


## SCB Edison Screw Base Space Heater



- Edison Screw Base
- 50 - 200 Watts
- 120 and 240 Volt
- Brass Sheath

### Dimensions

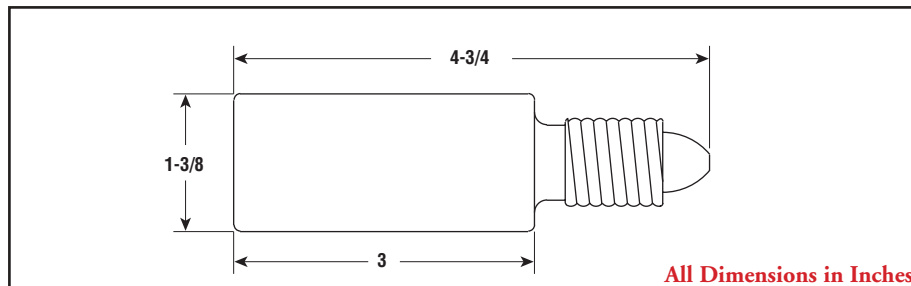

All Dimensions in Inches

### Applications

**Edison Screw Base** installs in standard porcelain lamp socket for simple installation.

**Prevent** moisture accumulation, mildew and freezing in clothes lockers, fire extinguisher cabinets and control boxes. Also used in resistor banks.

### Specifications and Ordering Information

Watts	Model	120V		240V		Wt. (Lbs.)
		Stock	PCN	Stock	PCN	
50	SCB-50	S	253809	—	—	0.6
75	SCB-75	S	253817	S	253825	0.6
100	SCB-100	S	253833	S	253841	0.6
150	SCB-150	S	253850	S	253868	0.6
200	SCB-200	S	256410	S	273560	0.6

**Stock Status:** S = stock NS = non-stock  
**To Order**—Specify model, PCN, watts, volts and quantity.

## Cartridge Accessory Sleeve Adapter

**3/8" Dia. Cartridge** heaters can be sleeved to fit 1/2 and 5/8" diameter holes, allowing one diameter to fit most applications.


**3/4" I.D. Sleeves** permit installation of type CIR high watt density heaters in 1-1/4" diameter holes to replace old style large diameter heaters.

**Makes Removal** of heaters easier. No more drilling, hammering, etc.

**Made of Steel**, these pressed powder metal sleeves have been designed and fully tested to assure proper transfer of heat from the cartridge heater to the work.


**800°F Maximum Work Temperature.** For higher work temperatures, contact your Local Chromalox Sales office.

### Dimensions

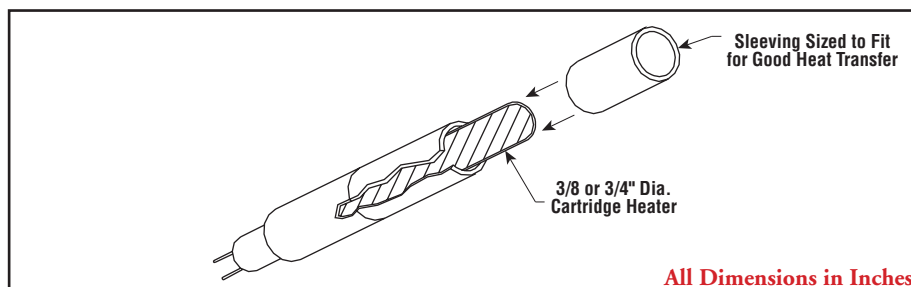

All Dimensions in Inches

### Dimensions

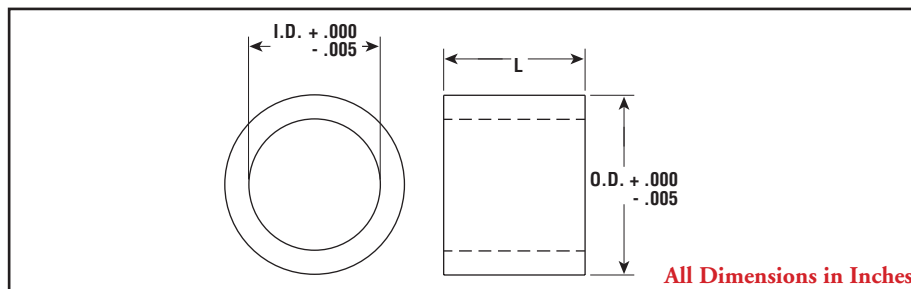

All Dimensions in Inches

### Specifications and Ordering Information

Dimensions (In.)			Model	Stock	PCN
I.D.	O.D.	Length			
3/8	0.498	1	264-055320-001	S	289756
3/8	0.622	1	264-055320-003	S	289764
3/4	1.25	1	264-055320-011	S	289801

**Stock Status:** S = stock NS = non-stock  
**To Order**—Specify model, PCN, watts, volts and quantity.