


ARMTI-2 Solution Water Applications



- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (46 - 51 W/in²)
- 2 - 15 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Single Phase
- General Purpose Terminal Enclosure

E1 — Dimensions (Inches)

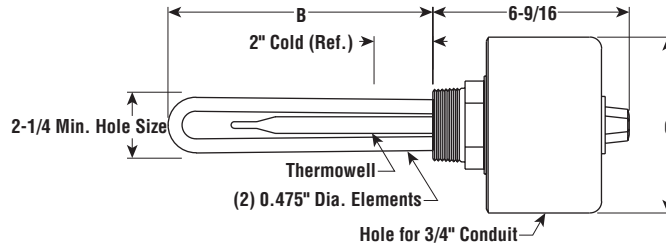

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
2	240	1	51	2	8	6	ARMTI-2205-3T2	NS	187987	ARMTI-2205-3T1	NS	187995
2	480	1	51	2	8	6	ARMTI-2205-3T2	NS	188023	ARMTI-2205-3T1	NS	188031
2.5	240	1	51	2	9	7	ARMTI-2255T2	NS	188066	ARMTI-2255T1	NS	188074
2.5	480	1	51	2	9	7	ARMTI-2255T2	NS	188103	ARMTI-2255T1	NS	188111
3	240	1	48	2	12	7	ARMTI-2305T2	NS	188146	ARMTI-2305T1	NS	188154
3	480	1	48	2	12	7	ARMTI-2305T2	NS	188189	ARMTI-2305T1	NS	188197
4	240	1	47	2	17-1/2	7	ARMTI-2405T2	NS	188226	ARMTI-2405T1	NS	188234
4	480	1	47	2	17-1/2	7	ARMTI-2405T2	NS	188269	ARMTI-2405T1	NS	188277
5	240	1	46	2	19-5/8	8	ARMTI-2505T2	NS	188306	ARMTI-2505T1	NS	188314
5	480	1	46	2	19-5/8	8	ARMTI-2505T2	NS	188349	ARMTI-2505T1	NS	188347
6	240	1	46	2	25-1/16	8	ARMTI-2605T2	NS	188381	ARMTI-2605T1	NS	188390
6	480	1	46	2	25-1/16	8	ARMTI-2605T2	NS	188429	ARMTI-2605T1	NS	188437
7	240	1	49	2	28-1/8	9	ARMTI-2705T2	NS	188461	ARMTI-2705T1	NS	188470
7	480	1	49	2	28-1/8	9	ARMTI-2705T2	NS	188509	ARMTI-2705T1	NS	188517
10	240	1	46	2	40-5/8	10	ARMTI-21005T2	NS	188541	ARMTI-21005T1	NS	188550
10	480	1	46	2	40-5/8	10	ARMTI-21005T2	NS	188584	ARMTI-21005T1	NS	188592
12	240	1	46	2	47-5/8	11	ARMTI-21205T2 ¹	NS	188621	ARMTI-21205T1 ¹	NS	188630
12	480	1	46	2	47-5/8	11	ARMTI-21205T2	NS	188664	ARMTI-21205T1	NS	188672
15	240	1	50	2	54	12	ARMTI-21505T2 ¹	NS	188701	ARMTI-21505T1 ¹	NS	188710
15	480	1	50	2	54	12	ARMTI-21505T2	NS	188744	ARMTI-21505T1	NS	188752

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not UL Listed or CSA Certified (Exceeds 48 Amps).

FASTShip

Same-day shipping on stock item
 orders received before 4 pm CST.
 3-day shipping on assembly-stock items.

ARMTI-2


Solution Water Applications *(cont'd.)*



SCREW PLUG

- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (46 - 51 W/in²)
- 2 - 15 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Single Phase
- Moisture Resistant/Explosion Resistant Terminal Enclosure

E2 — Dimensions (Inches)

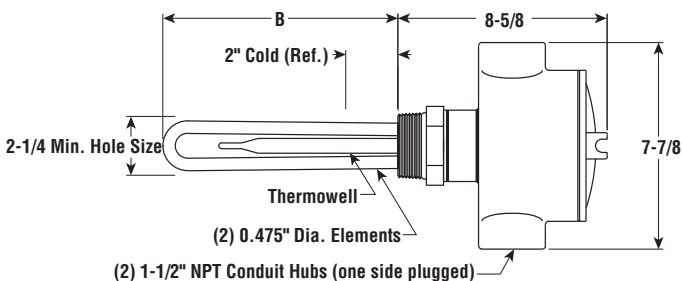

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E2 Moisture Resistant /Explosion Resistant												
2	240	1	51	2	8	12	ARMTI-2205-3E2T2	NS	188007	ARMTI-2205-3E2T1	NS	188015
2	480	1	51	2	8	12	ARMTI-2205-3E2T2	NS	188040	ARMTI-2205-3E2T1	NS	188058
2.5	240	1	51	2	9	13	ARMTI-2255E2T2	NS	188082	ARMTI-2255E2T1	NS	188090
2.5	480	1	51	2	9	13	ARMTI-2255E2T2	NS	188120	ARMTI-2255E2T1	NS	188138
3	240	1	48	2	12	13	ARMTI-2305E2T2	NS	188162	ARMTI-2305E2T1	NS	188170
3	480	1	48	2	12	13	ARMTI-2305E2T2	NS	188200	ARMTI-2305E2T1	NS	188218
4	240	1	47	2	17-1/2	13	ARMTI-2405E2T2	NS	188242	ARMTI-2405E2T1	NS	188250
4	480	1	47	2	17-1/2	13	ARMTI-2405E2T2	NS	188285	ARMTI-2405E2T1	NS	188293
5	240	1	46	2	19-5/8	14	ARMTI-2505E2T2	NS	188322	ARMTI-2505E2T1	NS	188330
5	480	1	46	2	19-5/8	14	ARMTI-2505E2T2	NS	188365	ARMTI-2505E2T1	NS	188373
6	240	1	46	2	25-1/16	14	ARMTI-2605E2T2	NS	188402	ARMTI-2605E2T1	NS	188410
6	480	1	46	2	25-1/16	14	ARMTI-2605E2T2	NS	188445	ARMTI-2605E2T1	NS	188453
7	240	1	49	2	28-1/8	15	ARMTI-2705E2T2	NS	188488	ARMTI-2705E2T1	NS	188496
7	480	1	49	2	28-1/8	15	ARMTI-2705E2T2	NS	188525	ARMTI-2705E2T1	NS	188533
10	240	1	46	2	40-5/8	16	ARMTI-21005E2T2	NS	188568	ARMTI-21005E2T1	NS	188576
10	480	1	46	2	40-5/8	16	ARMTI-21005E2T2	NS	188605	ARMTI-21005E2T1	NS	188613
12	240	1	46	2	47-5/8	17	ARMTI-21205E2T2 ¹	NS	188648	ARMTI-21205E2T1 ¹	NS	188656
12	480	1	46	2	47-5/8	17	ARMTI-21205E2T2	NS	188680	ARMTI-21205E2T1	NS	188699
15	240	1	50	2	54	18	ARMTI-21505E2T2 ¹	NS	188728	ARMTI-21505E2T1 ¹	NS	188736
15	480	1	50	2	54	18	ARMTI-21505E2T2	NS	188760	ARMTI-21505E2T1	NS	188779

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not cCSA_{US}® Certified (Exceeds 48 Amps).

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.


Immersion

AREMTI-3 Solution Water Applications


- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (45 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

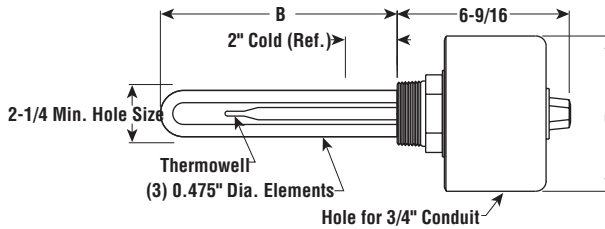

E2 — Dimensions (Inches)

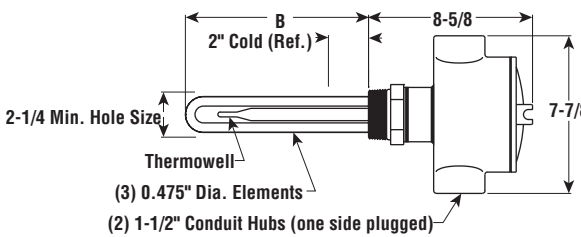

SCREW PLUG

Specifications and Ordering Information

kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
							Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
3	240	3	45	3	7-3/4	7	AREMTI-3305T2	NS	097990	AREMTI-3305T1	NS	032213
3	480	3	45	3	7-3/4	7	AREMTI-3305T2	NS	098001	AREMTI-3305T1	NS	032221
6	240	3	45	3	17-3/4	8	AREMTI-3605T2	S	099160	AREMTI-3605T1	NS	032230
6	480	3	45	3	17-3/4	8	AREMTI-3605T2	S	099178	AREMTI-3605T1	NS	032248
9	240	3	45	3	24-7/8	9	AREMTI-3905T2	S	099186	AREMTI-3905T1	NS	032256
9	480	3	45	3	24-7/8	9	AREMTI-3905T2	NS	099194	AREMTI-3905T1	NS	032264
12	240	3	45	3	32-7/16	10	AREMTI-31205T2	NS	099207	AREMTI-31205T1	NS	032272
12	480	3	45	3	32-7/16	10	AREMTI-31205T2	S	099215	AREMTI-31205T1	NS	032280
15	240	3	45	3	40-3/8	11	AREMTI-31505T2	NS	099223	AREMTI-31505T1	NS	032299
15	480	3	45	3	40-3/8	11	AREMTI-31505T2	S	099231	AREMTI-31505T1	NS	032301
18	240	3	45	3	47-7/8	12	AREMTI-31805T2	NS	099240	AREMTI-31805T1	NS	032310
18	480	3	45	3	47-7/8	12	AREMTI-31805T2	S	099258	AREMTI-31805T1	NS	032328
E2 Moisture Resistant/Explosion Resistant²												
3	240	3	45	3	7-3/4	12	AREMTI-3305E2T2	NS	032336	AREMTI-3305E2T1	NS	032459
3	480	3	45	3	7-3/4	12	AREMTI-3305E2T2	NS	032344	AREMTI-3305E2T1	NS	032467
6	240	3	45	3	17-3/4	13	AREMTI-3605E2T2	NS	032352	AREMTI-3605E2T1	NS	032475
6	480	3	45	3	17-3/4	13	AREMTI-3605E2T2	NS	032360	AREMTI-3605E2T1	NS	032483
9	240	3	45	3	24-7/8	14	AREMTI-3905E2T2	NS	032379	AREMTI-3905E2T1	NS	032491
9	480	3	45	3	24-7/8	14	AREMTI-3905E2T2	NS	032387	AREMTI-3905E2T1	NS	032504
12	240	3	45	3	32-7/16	15	AREMTI-31205E2T2	NS	032395	AREMTI-31205E2T1	NS	032512
12	480	3	45	3	32-7/16	15	AREMTI-31205E2T2	NS	032408	AREMTI-31205E2T1	NS	032520
15	240	3	45	3	40-3/8	16	AREMTI-31505E2T2	NS	032416	AREMTI-31505E2T1	NS	032539
15	480	3	45	3	40-3/8	16	AREMTI-31505E2T2	NS	032424	AREMTI-31505E2T1	NS	032547
18	240	3	45	3	47-7/8	17	AREMTI-31805E2T2	NS	032432	AREMTI-31805E2T1	NS	032555
18	480	3	45	3	47-7/8	17	AREMTI-31805E2T2	NS	032440	AREMTI-31805E2T1	NS	032563

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are ^CCSA_{US}® Certified.

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.


ARMTI-3 Solution Water Applications



SCREW PLUG

- 2-1/2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (46 - 53 W/in²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- General Purpose Terminal Enclosure

E1 — Dimensions (Inches)

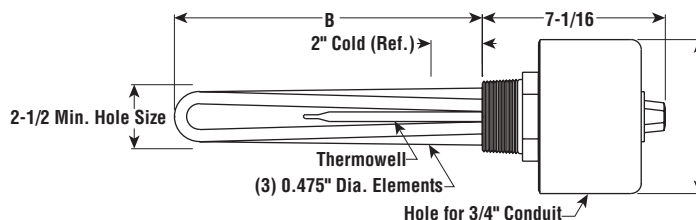

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/in ²	No. Elem.	DIM B (in.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
3	240	3	51	3	7	8	ARMTI-3305T2	NS	188787	ARMTI-3305T1	NS	188795
3	480	3	51	3	7	8	ARMTI-3305T2	NS	188824	ARMTI-3305T1	NS	188832
4.5	240	3	48	3	11	8	ARMTI-3455T2	NS	188867	ARMTI-3455T1	NS	188875
4.5	480	3	48	3	11	8	ARMTI-3455T2	NS	188904	ARMTI-3455T1	NS	188912
6	240	3	48	3	17-3/8	9	ARMTI-3605T2	NS	188947	ARMTI-3605T1	NS	188955
6	480	3	48	3	17-3/8	9	ARMTI-3605T2	NS	188980	ARMTI-3605T1	NS	188998
7.5	240	3	53	3	19	10	ARMTI-3755T2	NS	189026	ARMTI-3755T1	NS	189034
7.5	480	3	53	3	19	10	ARMTI-3755T2	NS	189069	ARMTI-3755T1	NS	189077
9	240	3	47	3	24-3/8	10	ARMTI-3905T2	NS	189106	ARMTI-3905T1	NS	189114
9	480	3	47	3	24-3/8	10	ARMTI-3905T2	NS	189149	ARMTI-3905T1	NS	189157
12	240	3	46	3	32-1/4	11	ARMTI-3120T2	NS	189181	ARMTI-3120T1	NS	189190
12	480	3	46	3	32-1/4	11	ARMTI-3120T2	NS	189229	ARMTI-3120T1	NS	189237
15	240	3	46	3	39-7/8	12	ARMTI-3150T2	NS	189261	ARMTI-3150T1	NS	189270
15	480	3	46	3	39-7/8	12	ARMTI-3150T2	NS	189309	ARMTI-3150T1	NS	189317
18	240	3	51	3	47-3/8	13	ARMTI-3180T2	NS	189341	ARMTI-3180T1	NS	189350
18	480	3	51	3	47-3/8	13	ARMTI-3180T2	NS	189384	ARMTI-3180T1	NS	189392

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

FASTShip

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are cCSA_{US}® Certified.


Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.

ARMTI-3 Solution Water Applications *(cont'd.)*



- 2-1/2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (46 - 53 W/in²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- Moisture Resistant/Explosion Resistant Terminal Enclosure

E2 — Dimensions (Inches)

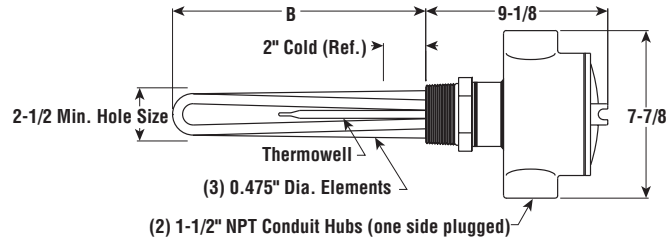

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E2 Moisture Resistant/Explosion Resistant²												
3	240	3	51	3	7	13	ARMTI-3305E2T2	NS	188808	ARMTI-3305E2T1	NS	188816
3	480	3	51	3	7	13	ARMTI-3305E2T2	NS	188840	ARMTI-3305E2T1	NS	188859
4.5	240	3	48	3	11	13	ARMTI-3455E2T2	NS	188883	ARMTI-3455E2T1	NS	188891
4.5	480	3	48	3	11	13	ARMTI-3455E2T2	NS	188920	ARMTI-3455E2T1	NS	188939
6	240	3	48	3	17-3/8	14	ARMTI-3605E2T2	NS	188963	ARMTI-3605E2T1	NS	188971
6	480	3	48	3	17-3/8	14	ARMTI-3605E2T2	NS	189000	ARMTI-3605E2T1	NS	189018
7.5	240	3	53	3	19	15	ARMTI-3755E2T2	NS	189042	ARMTI-3755E2T1	NS	189050
7.5	480	3	53	3	19	15	ARMTI-3755E2T2	NS	189085	ARMTI-3755E2T1	NS	189093
9	240	3	47	3	24-3/8	15	ARMTI-3905E2T2	NS	189122	ARMTI-3905E2T1	NS	189130
9	480	3	47	3	24-3/8	15	ARMTI-3905E2T2	NS	189165	ARMTI-3905E2T1	NS	189173
12	240	3	46	3	32-1/4	16	ARMTI-3120E2T2	NS	189202	ARMTI-3120E2T1	NS	189210
12	480	3	46	3	32-1/4	16	ARMTI-3120E2T2	NS	189245	ARMTI-3120E2T1	NS	189253
15	240	3	46	3	39-7/8	17	ARMTI-3150E2T2	NS	189288	ARMTI-3150E2T1	NS	189296
15	480	3	46	3	39-7/8	17	ARMTI-3150E2T2	NS	189325	ARMTI-3150E2T1	NS	189333
18	240	3	51	3	47-3/8	18	ARMTI-3180E2T2	NS	189368	ARMTI-3180E2T1	NS	189376
18	480	3	51	3	47-3/8	18	ARMTI-3180E2T2	NS	189405	ARMTI-3180E2T1	NS	189413

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are cCSA_{US}® Certified.

FASTShip™

Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.


AREMTI-3

Mildly Corrosive Solution Applications




- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- Medium Watt Density (23 W/In²)
- 3 - 9 kW
- Integral Thermostat (DPST)
- 120, 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

E1 — Dimensions (Inches)

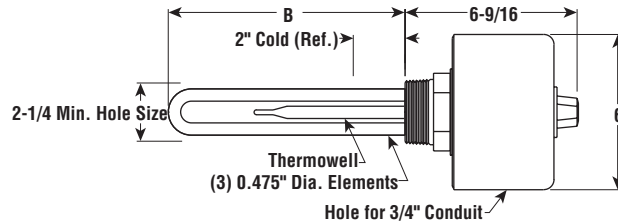

E2 — Dimensions (Inches)

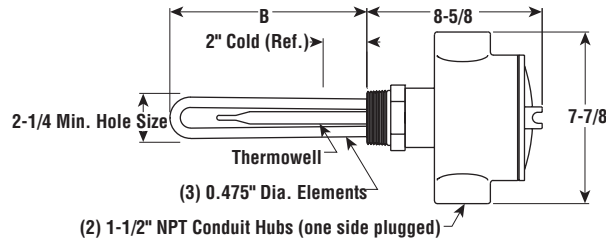

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
3	240	3	23	3	17-3/4	8	AREMTI-30305T2	NS	091985	AREMTI-30305T1	NS	032694
3	480	3	23	3	17-3/4	8	AREMTI-30305T2	NS	091993	AREMTI-30305T1	NS	032707
4.5	240	3	23	3	24-7/8	9	AREMTI-30455T2	NS	092005	AREMTI-30455T1	NS	032715
4.5	480	3	23	3	24-7/8	9	AREMTI-30455T2	NS	097560	AREMTI-30455T1	NS	032723
6	240	3	23	3	32-7/16	10	AREMTI-30605T2	NS	097578	AREMTI-30605T1	NS	032731
6	480	3	23	3	32-7/16	10	AREMTI-30605T2	NS	097586	AREMTI-30605T1	NS	032740
7.5	240	3	23	3	40-3/8	11	AREMTI-30755T2	NS	097594	AREMTI-30755T1	NS	032758
7.5	480	3	23	3	40-3/8	11	AREMTI-30755T2	NS	097607	AREMTI-30755T1	NS	032766
9	240	3	23	3	47-7/8	12	AREMTI-30905T2	NS	097615	AREMTI-30905T1	NS	032774
9	480	3	23	3	47-7/8	12	AREMTI-30905T2	NS	097623	AREMTI-30905T1	NS	032782
E2 Moisture Resistant/Explosion Resistant²												
3	240	3	23	3	17-3/4	13	AREMTI-30305E2T2	NS	032790	AREMTI-30305E2T1	NS	032897
3	480	3	23	3	17-3/4	13	AREMTI-30305E2T2	NS	032803	AREMTI-30305E2T1	NS	032900
4.5	240	3	23	3	24-7/8	14	AREMTI-30455E2T2	NS	032811	AREMTI-30455E2T1	NS	032918
4.5	480	3	23	3	24-7/8	14	AREMTI-30455E2T2	NS	032820	AREMTI-30455E2T1	NS	032926
6	240	3	23	3	32-7/16	15	AREMTI-30605E2T2	NS	032838	AREMTI-30605E2T1	NS	032934
6	480	3	23	3	32-7/16	15	AREMTI-30605E2T2	NS	032846	AREMTI-30605E2T1	NS	032942
7.5	240	3	23	3	40-3/8	16	AREMTI-30755E2T2	NS	032854	AREMTI-30755E2T1	NS	032950
7.5	480	3	23	3	40-3/8	16	AREMTI-30755E2T2	NS	032862	AREMTI-30755E2T1	NS	032969
9	240	3	23	3	47-7/8	17	AREMTI-30905E2T2	NS	032870	AREMTI-30905E2T1	NS	032977
9	480	3	23	3	47-7/8	17	AREMTI-30905E2T2	NS	032889	AREMTI-30905E2T1	NS	032985

Stock Status: S = stock NS = non-stock
To Order — Specify model, volts, phase, kW, PCN and quantity.



Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA_{US} Certified.


AREMTI-3

Severely Corrosive Solution Applications


- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- Low Watt Density (15 W/In²)
- 1 - 6 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

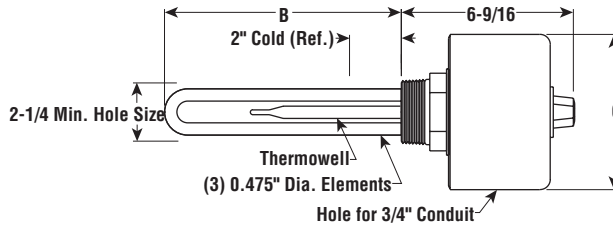

E2 — Dimensions (Inches)

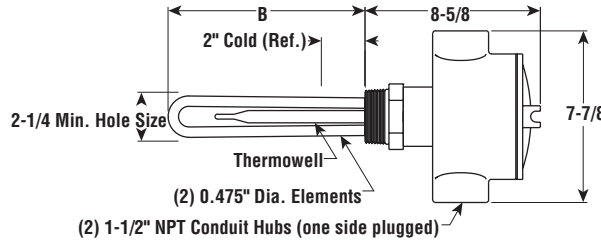

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
1	240	3	15	3	7-3/4	7	AREMTI-3015T2	NS	091563	AREMTI-3015T1	NS	034091
1	480	3	15	3	7-3/4	7	AREMTI-3015T2	NS	091571	AREMTI-3015T1	NS	034104
2	240	3	15	3	17-3/4	8	AREMTI-3025T2	NS	091580	AREMTI-3025T1	NS	034112
2	480	3	15	3	17-3/4	8	AREMTI-3025T2	NS	091598	AREMTI-3025T1	NS	034120
3	240	3	15	3	24-7/8	9	AREMTI-3035T2	NS	091600	AREMTI-3035T1	NS	034139
3	480	3	15	3	24-7/8	9	AREMTI-3035T2	NS	091619	AREMTI-3035T1	NS	034147
4	240	3	15	3	32-7/16	10	AREMTI-3045T2	NS	091627	AREMTI-3045T1	NS	034155
4	480	3	15	3	32-7/16	10	AREMTI-3045T2	NS	091635	AREMTI-3045T1	NS	034163
5	240	3	15	3	40-3/8	11	AREMTI-3055T2	NS	091643	AREMTI-3055T1	NS	034171
5	480	3	15	3	40-3/8	11	AREMTI-3055T2	NS	091651	AREMTI-3055T1	NS	034180
6	240	3	15	3	47-7/8	12	AREMTI-3065T2	NS	091660	AREMTI-3065T1	NS	034198
6	480	3	15	3	47-7/8	12	AREMTI-3065T2	NS	091678	AREMTI-3065T1	NS	034200
E2 Moisture Resistant/Explosion Resistant²												
1	240	3	15	3	7-3/4	12	AREMTI-3015E2T2	NS	034219	AREMTI-3015E2T1	NS	034331
1	480	3	15	3	7-3/4	12	AREMTI-3015E2T2	NS	034227	AREMTI-3015E2T1	NS	034340
2	240	3	15	3	17-3/4	13	AREMTI-3025E2T2	NS	034235	AREMTI-3025E2T1	NS	034358
2	480	3	15	3	17-3/4	13	AREMTI-3025E2T2	NS	034243	AREMTI-3025E2T1	NS	034366
3	240	3	15	3	24-7/8	14	AREMTI-3035E2T2	NS	034251	AREMTI-3035E2T1	NS	034374
3	480	3	15	3	24-7/8	14	AREMTI-3035E2T2	NS	034260	AREMTI-3035E2T1	NS	034382
4	240	3	15	3	32-7/16	15	AREMTI-3045E2T2	NS	034278	AREMTI-3045E2T1	NS	034390
4	480	3	15	3	32-7/16	15	AREMTI-3045E2T2	NS	034286	AREMTI-3045E2T1	NS	034403
5	240	3	15	3	40-3/8	16	AREMTI-3055E2T2	NS	034294	AREMTI-3055E2T1	NS	034411
5	480	3	15	3	40-3/8	16	AREMTI-3055E2T2	NS	034307	AREMTI-3055E2T1	NS	034420
6	240	3	15	3	47-7/8	17	AREMTI-3065E2T2	NS	034315	AREMTI-3065E2T1	NS	034438
6	480	3	15	3	47-7/8	17	AREMTI-3065E2T2	NS	034323	AREMTI-3065E2T1	NS	034446

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are _CCSA_{US}® Certified.

