

2104 1/4 DIN Temperature and Process Controller



- Dual PID & Fuzzy Logic Control
- Control Loop Protection
- Five Outputs-Control, Alarm or Event
- Universal Sensor Inputs: TC, RTD, Voltage and Current
- Switching Power Supply 100-240 Vac or 12-24 Vac/Vdc, 50/60 Hz
- 16 Segment Ramp/Soak Program
- Digital Communications with ChromaSoft™ SpecView® Software Compatibility
- Isolated 12Vdc Power Supply Option
- Operating Ambient up to 150°F
- Three Year Warranty

Description


The Chromalox 2104 1/4 DIN Temperature and Process Controller is a low cost, high performance single loop controller that can be used for temperature, flow, pressure and level control applications. With universal sensor inputs and front panel operator setup, one 2104 controller can be easily field configured for a wide variety of applications, and simply reconfigured as application needs change. This makes it an exceptional choice for OEMs and distributors with multiple control needs, manufacturing facilities, testing facilities and testing applications.

Features

- Five (5) Possible Outputs for Single Output or Heat/Cool Control, plus up to three Alarm or Event Outputs.
- Universal Sensor Input accepts thermocouple, RTD or analog signals, provides 24Vdc Output for loop power.
- Self-Tuning with Fuzzy Logic optimizes PID control and minimizes overshoot.
- Digital Input for remote switching of one of the following:
 - PID1/PID2
 - Remote/Local Setpoint
 - Main/Auxiliary Setpoint
 - Ramp/Soak Operation
 - Manual/Auto Control
 - Alarm Reset for Latching Alarms
- 16 Interval Ramp/Soak Program with guaranteed soak, 3 event outputs and looping.
- Programmable Analog Output and Remote Setpoint Input

- AUX Pushbutton and LED for front panel switching of:
 - PID1/PID2
 - Remote/Local Setpoint
 - Main/Auxiliary Setpoint
 - Ramp/Soak Operation
 - Manual/Auto Control
- Security Code Protection prevents unauthorized access.
- Setpoint Ramp Rate provides Soft Start at powerup, or on setpoint changes, to prevent uneven heating and overshoot.
- Control Loop Protection provides process protection from:
 - Open Sensor
 - Shorted Sensor
 - Sensor Reversed
 - Control Output Open or Shorted
 - Power Control Device Open or Shorted
 - Load Power Missing and Self Diagnostics.

Self-Tuning with Fuzzy Logic

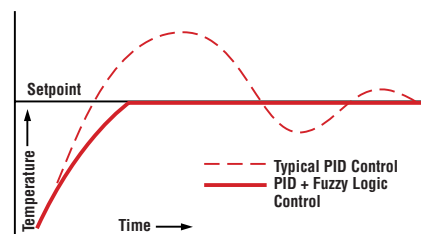


2104 Controller (cont'd.) Specifications

| | | |
|--|--|---|
| Control Modes | Automatic.....On/Off, Proportional (P), PID, PID + Fuzzy Logic, Heat/Cool | |
| Control Adjustments | Control Setpoint.....Sensor Range Setpoint Limits.....Sensor Range Deadband.....1-100°F Proportional Band.....Sensor Range Manual Reset.....-99.9 to +99.9 Automatic Reset.....0-99.99 repeats/min. Rate.....0-500 sec. Output Cycle Time.....0.0-60.0 sec. Output Limit.....0-100% Open Sensor/Out of Range Output.....0-100% Display Offset.....-100 to +100°F | |
| Heat/Cool Adjustments | Output Offsets.....0-100% Prop. Band Cooling Medium.....Air, Water or Oil | |
| Alarm Adjustments | Setpoints.....High and Low Settings for each Alarm Output Alarm Types.....Absolute: High, Low and High/LowTracking: + Deviation, - Deviation and +/- Deviation Relay Action.....Latching or Non-Latching, Energized or De-Energized Alarm Deadband.....Adjustable, 0-100°F | |
| Control/Alarm Outputs | Total of five (5) Control/Alarm outputs possible Relay.....Relay-Form A contacts, 1 Amp at 120/230 Vac (resistive load) Solid State Relay Drive.....24Vdc nominal at 40mA Triac.....1 Amp continuous, 10 Amp in-rush, at 120 or 230 Vac Current/Voltage.....4-20mA into 0-800 , field changeable to 1-5Vdc | |
| Output #5 (Optional) | Relay-NO. Form C contact, 5A at 120 or 2.5A at 230 Vac | |
| Sensor Input Specifications | Range °F | Range °C |
| J T/C | -100 to +1400 | -73 to +760 |
| K T/C | -300 to +2400 | -184 to +1316 |
| T T/C | -350 to +750 | -212 to +399 |
| E T/C | -100 to +1100 | -73 to +593 |
| R T/C | 0-3200 | -18 to +1760 |
| S T/C | 0-3200 | -18 to +1760 |
| B T/C | 50-3300 | 10-1816 |
| 100 Pt RTD (a = 0.00385) | -200 to +1000 | -128 to +538 |
| RTD (0.1° res.) | -99.9 to +899.9 | -73.3 to +482.2 |
| 4-20mA | -500 to +5000 (programmable) | |
| 0-5 Vdc | -500 to +5000 (programmable) | |
| 1-5 Vdc | -500 to +5000 (programmable) | |
| Ramp/Soak Programming | Intervals.....16 intervals Loops.....1 loop, 0-255 times or continuous Event Outputs.....Up to 3 Guaranteed Soak Differential.....Off, 1°F to sensor span Time Units.....Seconds, Minutes, Hours (1 second to 99.99 hours/segment) | |
| Remote Setpoint Input | Input Signal.....4-20mA or 1-5Vdc, Field Selectable | |
| Digital Input | Accepts dry-contact closure | |
| Analog Output Option | Assignable Functions..... | Output #1 Command Output #2 Command |
| |Active Setpoint | |
| | Output Signal..... | 4-20mA into 0-800 load, 1-5Vdc into 100K or greater load |
| |Selectable via DIP switch | |
| | Range..... | Programmable for retransmission of Process Variable and Active Setpoint |
| Isolated DC Power Supply Option | 12Vdc, 50mA Max | |
| Digital Communications (Optional) | Single drop, isolated Multi-drop, isolated, field selectable by switch | |
| RS-232 | | |
| RS-422/485 | | |
| Baud Rates | 1200, 2400, 4800, 9600, 19200 | |
| Protocols | ASCII Line, Computer Interface | |
| Instrument Power | 100-240 Vac, +10%, -15%; 12-24 Vac/Vdc, ± 10%; 50-60 Hz, 15vA | |
| Operating Environment | 32-150°F (0-65°C) ambient temperature, relative humidity < 95%, non-condensing | |

2104

1/4 DIN Temperature and Process Controller *(cont'd.)*

Dimensions

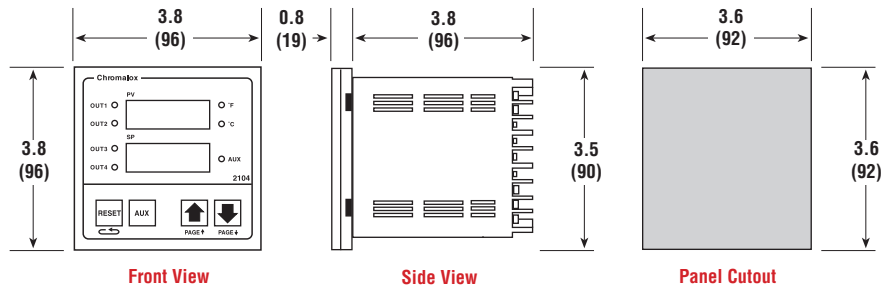

All Dimensions in Inches (mm)

Ordering Information

Complete the Model Number using the Matrix provided.

In Stock:

| Model | PCN |
|------------|--------|
| 2104-R0000 | 306510 |
| 2104-R0100 | 306528 |
| 2104-A0000 | 306579 |
| 2104-A0100 | 306587 |

All other models, one day delivery.

Model Temperature and Process Controller

2104 Microprocessor-based 1/4 DIN Temperature Controller. Universal Sensor Input accepts Thermocouple, RTD, Current or Voltage Inputs with 24Vdc Transmitter Power Supply. PID, ON/OFF and Fuzzy Logic Control Capability. One Digital Input, Analog Remote Setpoint, and 16 Segment Ramp/Soak Program.

Code Output #1 - Single Output Control

RO Relay/SSR Drive (jumper selectable)
Relay—NO. Form A Contact, 1A at 120 or 230 Vac
SSR Drive—24Vdc at 40mA

TO Triac—1 Amp at 120 or 230 Vac

AO Analog—4-20mA or 1-5 Vdc, non-isolated

Outputs #1 & #2 - Heat/Cool Control

RR Relay/Relay
TT Triac/Triac
AA Analog/Analog
SS SSR Drive/SSR Drive
AR Analog/Relay
AT Analog/Triac
SR SSR Drive/Relay (SSR Drive/Triac is Obsolete, replaced by SR)

Code Outputs #3 & #4 or Power Supply Option

0 None
1 Dual Relay—Form A contact, 1A at 120 or 230 Vac with shared common terminal
7 Isolated Power Supply 12Vdc, 50mA

Code Isolated Digital Communications, Output #5 (Alarm/Event Output) and Analog Output Option

0 None
1 RS-422/485 Digital Communications and Output #5
2 RS-232 Digital Communications and Output #5
3 Analog Output Option
4 RS-422/485 Digital Communications, Output #5 and Analog Output Option
5 RS-232 Digital Communications with Output #5, and Analog Output Option

Code Power Supply

0 100-240 Vac
1 12-24 Vac/Vdc

2104 - RO 1 1 0 Typical Model Number