


AREMTI-3

Severely Corrosive Solution Applications


- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- Low Watt Density (15 W/In²)
- 1 - 6 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

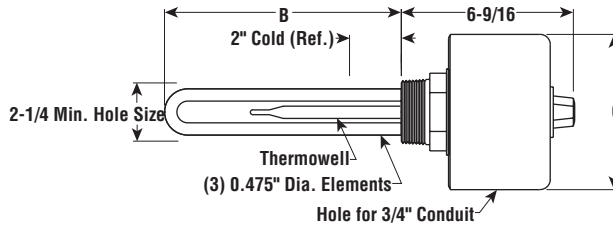

E2 — Dimensions (Inches)

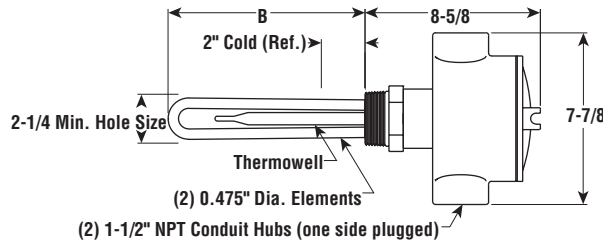

Specifications and Ordering Information

| | | | | | | | T2 — Temperature (60 - 250°F) | | | T1 — Temperature (0 - 100°F) | | |
|--|-------|-------|-------------------|-----------|-------------|------------|-------------------------------|-------|--------|------------------------------|-------|--------|
| kW | Volts | Phase | W/In ² | No. Elem. | DIM B (In.) | Wt. (Lbs.) | Model | Stock | PCN | Model | Stock | PCN |
| E1 General Purpose¹ | | | | | | | | | | | | |
| 1 | 240 | 3 | 15 | 3 | 7-3/4 | 7 | AREMTI-3015T2 | NS | 091563 | AREMTI-3015T1 | NS | 034091 |
| 1 | 480 | 3 | 15 | 3 | 7-3/4 | 7 | AREMTI-3015T2 | NS | 091571 | AREMTI-3015T1 | NS | 034104 |
| 2 | 240 | 3 | 15 | 3 | 17-3/4 | 8 | AREMTI-3025T2 | NS | 091580 | AREMTI-3025T1 | NS | 034112 |
| 2 | 480 | 3 | 15 | 3 | 17-3/4 | 8 | AREMTI-3025T2 | NS | 091598 | AREMTI-3025T1 | NS | 034120 |
| 3 | 240 | 3 | 15 | 3 | 24-7/8 | 9 | AREMTI-3035T2 | NS | 091600 | AREMTI-3035T1 | NS | 034139 |
| 3 | 480 | 3 | 15 | 3 | 24-7/8 | 9 | AREMTI-3035T2 | NS | 091619 | AREMTI-3035T1 | NS | 034147 |
| 4 | 240 | 3 | 15 | 3 | 32-7/16 | 10 | AREMTI-3045T2 | NS | 091627 | AREMTI-3045T1 | NS | 034155 |
| 4 | 480 | 3 | 15 | 3 | 32-7/16 | 10 | AREMTI-3045T2 | NS | 091635 | AREMTI-3045T1 | NS | 034163 |
| 5 | 240 | 3 | 15 | 3 | 40-3/8 | 11 | AREMTI-3055T2 | NS | 091643 | AREMTI-3055T1 | NS | 034171 |
| 5 | 480 | 3 | 15 | 3 | 40-3/8 | 11 | AREMTI-3055T2 | NS | 091651 | AREMTI-3055T1 | NS | 034180 |
| 6 | 240 | 3 | 15 | 3 | 47-7/8 | 12 | AREMTI-3065T2 | NS | 091660 | AREMTI-3065T1 | NS | 034198 |
| 6 | 480 | 3 | 15 | 3 | 47-7/8 | 12 | AREMTI-3065T2 | NS | 091678 | AREMTI-3065T1 | NS | 034200 |
| E2 Moisture Resistant/Explosion Resistant² | | | | | | | | | | | | |
| 1 | 240 | 3 | 15 | 3 | 7-3/4 | 12 | AREMTI-3015E2T2 | NS | 034219 | AREMTI-3015E2T1 | NS | 034331 |
| 1 | 480 | 3 | 15 | 3 | 7-3/4 | 12 | AREMTI-3015E2T2 | NS | 034227 | AREMTI-3015E2T1 | NS | 034340 |
| 2 | 240 | 3 | 15 | 3 | 17-3/4 | 13 | AREMTI-3025E2T2 | NS | 034235 | AREMTI-3025E2T1 | NS | 034358 |
| 2 | 480 | 3 | 15 | 3 | 17-3/4 | 13 | AREMTI-3025E2T2 | NS | 034243 | AREMTI-3025E2T1 | NS | 034366 |
| 3 | 240 | 3 | 15 | 3 | 24-7/8 | 14 | AREMTI-3035E2T2 | NS | 034251 | AREMTI-3035E2T1 | NS | 034374 |
| 3 | 480 | 3 | 15 | 3 | 24-7/8 | 14 | AREMTI-3035E2T2 | NS | 034260 | AREMTI-3035E2T1 | NS | 034382 |
| 4 | 240 | 3 | 15 | 3 | 32-7/16 | 15 | AREMTI-3045E2T2 | NS | 034278 | AREMTI-3045E2T1 | NS | 034390 |
| 4 | 480 | 3 | 15 | 3 | 32-7/16 | 15 | AREMTI-3045E2T2 | NS | 034286 | AREMTI-3045E2T1 | NS | 034403 |
| 5 | 240 | 3 | 15 | 3 | 40-3/8 | 16 | AREMTI-3055E2T2 | NS | 034294 | AREMTI-3055E2T1 | NS | 034411 |
| 5 | 480 | 3 | 15 | 3 | 40-3/8 | 16 | AREMTI-3055E2T2 | NS | 034307 | AREMTI-3055E2T1 | NS | 034420 |
| 6 | 240 | 3 | 15 | 3 | 47-7/8 | 17 | AREMTI-3065E2T2 | NS | 034315 | AREMTI-3065E2T1 | NS | 034438 |
| 6 | 480 | 3 | 15 | 3 | 47-7/8 | 17 | AREMTI-3065E2T2 | NS | 034323 | AREMTI-3065E2T1 | NS | 034446 |

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.



Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
 2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are _CCSA_{US}® Certified.