


AREMTS-3

Mildly Corrosive Solution Applications




- 2" NPT Stainless Steel Passivated Screw Plug
- Stainless Steel Passivated Sheath Elements
- Medium Watt Density (23 W/In²)
- 3 - 9 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

E1 — Dimensions (Inches)

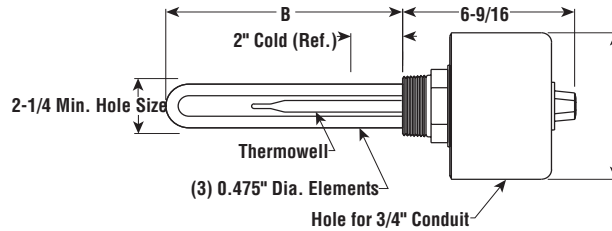

E2 — Dimensions (Inches)

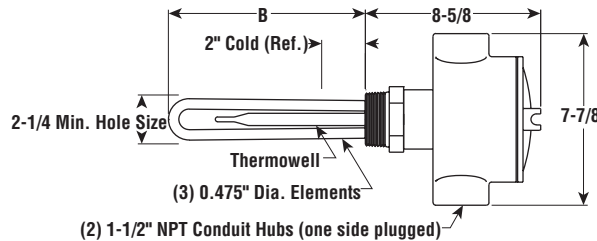

Specifications and Ordering Information

kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
							Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
3	240	3	23	3	17-3/4	8	AREMTS-30305T2	NS	091782	AREMTS-30305T1	NS	032993
3	480	3	23	3	17-3/4	8	AREMTS-30305T2	NS	091790	AREMTS-30305T1	NS	033005
4.5	240	3	23	3	24-7/8	9	AREMTS-30455T2	NS	091803	AREMTS-30455T1	NS	033013
4.5	480	3	23	3	24-7/8	9	AREMTS-30455T2	NS	091811	AREMTS-30455T1	NS	033021
6	240	3	23	3	32-7/16	10	AREMTS-30605T2	NS	091820	AREMTS-30605T1	NS	033030
6	480	3	23	3	32-7/16	10	AREMTS-30605T2	NS	091838	AREMTS-30605T1	NS	033048
7.5	240	3	23	3	40-3/8	11	AREMTS-30755T2	NS	091846	AREMTS-30755T1	NS	033056
7.5	480	3	23	3	40-3/8	11	AREMTS-30755T2	NS	091854	AREMTS-30755T1	NS	033064
9	240	3	23	3	47-7/8	12	AREMTS-30905T2	NS	091862	AREMTS-30905T1	NS	033072
9	480	3	23	3	47-7/8	12	AREMTS-30905T2	NS	091870	AREMTS-30905T1	NS	033080
E2 Moisture Resistant/Explosion Resistant²												
3	240	3	23	3	17-3/4	13	AREMTS-30305E2T2	NS	033099	AREMTS-30305E2T1	NS	033195
3	480	3	23	3	17-3/4	13	AREMTS-30305E2T2	NS	033101	AREMTS-30305E2T1	NS	033208
4.5	240	3	23	3	24-7/8	14	AREMTS-30455E2T2	NS	033110	AREMTS-30455E2T1	NS	033216
4.5	480	3	23	3	24-7/8	14	AREMTS-30455E2T2	NS	033128	AREMTS-30455E2T1	NS	033224
6	240	3	23	3	32-7/16	15	AREMTS-30605E2T2	NS	033136	AREMTS-30605E2T1	NS	033232
6	480	3	23	3	32-7/16	15	AREMTS-30605E2T2	NS	033144	AREMTS-30605E2T1	NS	033240
7.5	240	3	23	3	40-3/8	16	AREMTS-30755E2T2	NS	033152	AREMTS-30755E2T1	NS	033259
7.5	480	3	23	3	40-3/8	16	AREMTS-30755E2T2	NS	033160	AREMTS-30755E2T1	NS	033267
9	240	3	23	3	47-7/8	17	AREMTS-30905E2T2	NS	033179	AREMTS-30905E2T1	NS	033275
9	480	3	23	3	47-7/8	17	AREMTS-30905E2T2	NS	033187	AREMTS-30905E2T1	NS	033283

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are c_SA_US[®] Certified.



Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.