



## BT & CF PROBES

### Bayonet & Compression RTDs

- Service Temperature to 900°F (482°C)
- 304 Stainless Steel Construction
- Flexible 0.275" Stainless Steel Cable (60" Length Standard)
- 45° Bend Available on Both BT and CF Styles
- A Wide Variety of Immersion Lengths, Styles and Mounting Arrangements Available
- Ideal for Extruders and Packaging Machines
- Precision 100 Ohm PT RTD Element

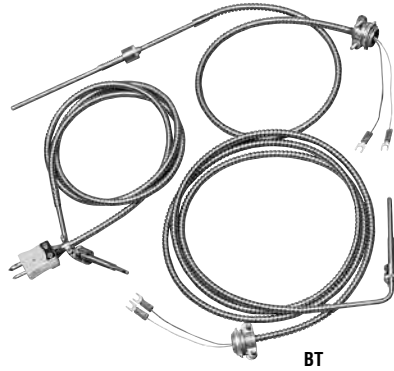

BT

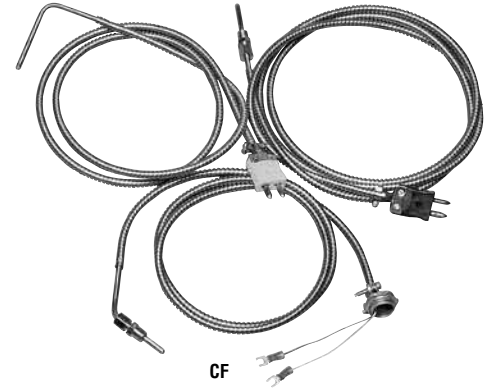


CF


#### Termination Types —




Bayonet Adapter BTA-1



#### Bayonet

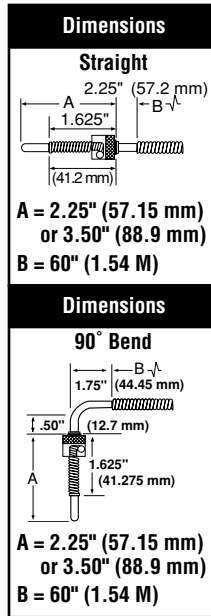

#### Compression Fitting

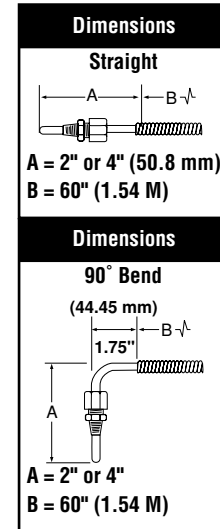

#### In Stock:

| Model                   | PCN    |
|-------------------------|--------|
| CF-000-RTD-2-60-1/C     | 327388 |
| CF-000-RTD-4-60-1/C     | 327396 |
| CF-090-RTD-2-60-1/C     | 327409 |
| CF-090-RTD-4-60-1/C     | 327417 |
| BTA-1 (Bayonet Adapter) | 308558 |

| CODE   | Assembly Type  |    |      |                      |
|--------|--|----|------|----------------------|
| BT-000 | Straight Probe with a Spring Loaded Bayonet Fitting      |    |      |                      |
| CF-000 | Straight Probe with a Brass 1/8 NPT Compression Fitting  |    |      |                      |
| BT-090 | 90° Angle Probe with a Spring Loaded Bayonet Fitting     |    |      |                      |
| CF-090 | 90° Angle Probe with a Brass 1/8 NPT Compression Fitting |    |      |                      |
| CODE   | Sensor Type  |    |      |                      |
|        | RTD  |    |      |                      |
|        | 3-WIRE, 100 OHM, PLATINUM RTD                            |    |      |                      |
| CODE   | Insertion Length (Inches)                                |    |      |                      |
| 2-1/4  | Bayonet Style Only                                       |    |      |                      |
| 3-1/2  | Bayonet Style Only                                       |    |      |                      |
| 2      | CF Style Only  |    |      |                      |
| 4      | CF Style Only  |    |      |                      |
| CODE   | End Termination  |    |      |                      |
| 1/C    | SPADE LUGS   |    |      |                      |
| 2/C    | OTP (M) Connector for RTD                                |    |      |                      |
|        | OST (M) Connector for Thermocouple                       |    |      |                      |
| BT-090 | -J   | -2 | -2/C | Typical Model Number |