


CH-SD

Clean Water Applications

- 2" NPT Brass Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (50 W/in²)
- 5 - 10 kW
- Without Thermostat
- 208, 240 and 480 Volt, 1 and 3 Phase
- General Purpose Terminal Enclosure



Dimensions (Inches)

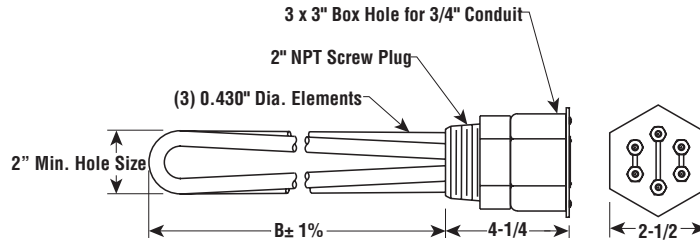

Specifications and Ordering Information

kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN
5	208	3	56	3	12-7/8	9	CH-SD-5083	S	096022
5	240	3	56	3	12-7/8	9	CH-SD-5043	S	096030
5	480	3	56	3	12-7/8	9	CH-SD-5053	S	096049
5	208	1	56	3	12-7/8	9	CH-SD-508	S	096057
5	240	1	56	3	12-7/8	9	CH-SD-504	S	096065
7.5	208	3	56	3	18-3/8	10	CH-SD-7583	S	096073
7.5	240	3	56	3	18-3/8	10	CH-SD-7543	S	096081
10	208	3	68	3	20	10	CH-SD-10083	S	096090
10	240	3	68	3	20	10	CH-SD-10043	S	096102
10	480	3	68	3	20	10	CH-SD-10053	S	096110

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."