


Immersion

EMTS-3

Severely Corrosive Solution Applications


- 2" NPT Stainless Steel Passivated Screw Plug
- Stainless Steel Passivated Sheath Elements
- Low Watt Density (15 W/In²)
- 1 - 6 kW
- Without Thermostat
- 240 and 480 Volt, Three Phase
- General Purpose, Moisture Resistant/Explosion Resistant Terminal Enclosure or Moisture Resistant

E1 — Dimensions (Inches)

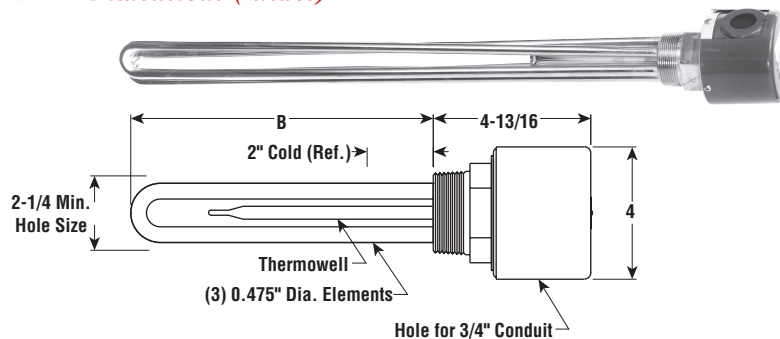


SCREW PLUG

E2 — Dimensions (Inches)

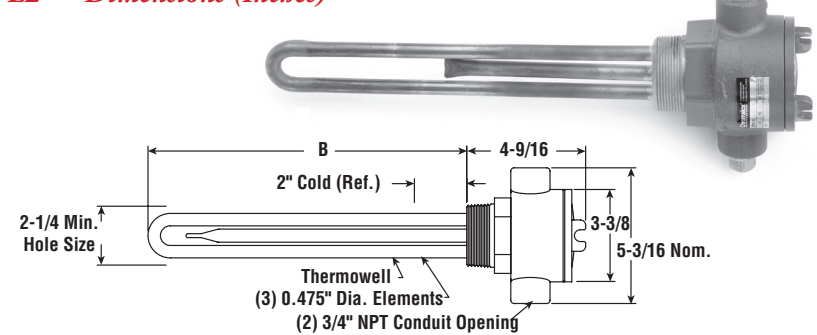

E4TP — Dimensions (Inches)

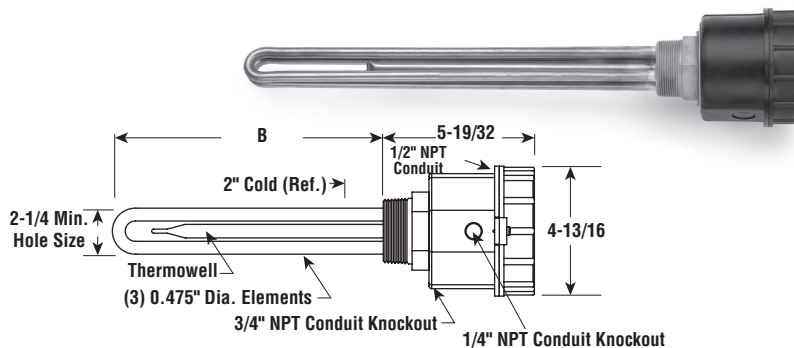

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/ Explosion Resistant ²				E4 Moisture Resistant			
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
1	240	3	15	3	7-3/4	EMTS-301	NS	090472	5	EMTS-301E2	NS	033611	8	EMTS-301E4TP	NS	061399	11
1	480	3	15	3	7-3/4	EMTS-301	NS	090480	5	EMTS-301E2	NS	033620	8	EMTS-301E4TP	NS	061401	11
2	240	3	15	3	17-3/4	EMTS-302	NS	090499	6	EMTS-302E2	NS	033638	9	EMTS-302E4TP	NS	061410	12
2	480	3	15	3	17-3/4	EMTS-302	NS	090501	6	EMTS-302E2	NS	033646	9	EMTS-302E4TP	NS	061428	12
3	240	3	15	3	24-7/8	EMTS-303	NS	091248	7	EMTS-303E2	NS	033654	10	EMTS-303E4TP	NS	061452	13
3	480	3	15	3	24-7/8	EMTS-303	NS	091256	7	EMTS-303E2	NS	033662	10	EMTS-303E4TP	NS	061460	13
4	240	3	15	3	32-7/16	EMTS-304	NS	091264	9	EMTS-304E2	NS	033670	12	EMTS-304E4TP	NS	061495	15
4	480	3	15	3	32-7/16	EMTS-304	NS	091272	9	EMTS-304E2	NS	033689	12	EMTS-304E4TP	NS	061508	15
5	240	3	15	3	40-3/8	EMTS-305	NS	091280	10	EMTS-305E2	NS	033697	13	EMTS-305E4TP	NS	061516	16
5	480	3	15	3	40-3/8	EMTS-305	NS	091299	10	EMTS-305E2	NS	033700	13	EMTS-305E4TP	NS	061524	16
6	240	3	15	3	47-7/8	EMTS-306	NS	091301	12	EMTS-306E2	NS	033718	15	EMTS-306E4TP	NS	061559	18
6	480	3	15	3	47-7/8	EMTS-306	NS	091310	12	EMTS-306E2	NS	033726	15	EMTS-306E4TP	NS	061567	18

Stock Status: S = stock NS = non-stock
 To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are ^CCSA_{US}® Certified.



Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.