


PRODUCT OVERVIEW

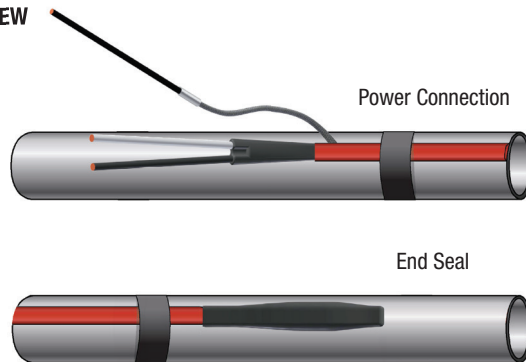

The Chromalox® HSK-PC is a power connection / end termination kit for CPR heating cables for grease waste, frost heave and freeze protection applications. The kit contains enough parts to make one (1) connection and is approved for use in ordinary area locations.

DESCRIPTION

This kit provides water resistant power connection / end termination for self-regulating and constant wattage heating cable.

KIT CONTENTS

- 1 ½-Inch-Diameter Heat Shrink Tube
- 1 ½-Inch-Diameter Heat Shrink Cap
- 1 ½-Inch-Diameter Woven Braid Sleeve
- 1 ¾-Inch-Diameter Heat Shrink Tube
- 1 Uninsulated Barrel Connector
- 2 Insulated Barrel Connectors
- 1 Adhesive Backed Warning Label

MATERIALS

Heat Shrink Polyolefin
Barrel Connectors Tinned Copper

APPROVALS



PRODUCT SPECIFICATIONS

Heating Cable Use CPR
Maximum Maintenance Temperature 150°F (65°C)
Maximum Exposure Temperature, Power Off 185°F (85°C)
Minimal Install Temperature 0°F (-18°C)
Maximum Voltage 277 V
Maximum Circuit Breaker 40 A
Conductor Size 16 AWG
Weight 1 lb (.45 kg)

ORDER DETAILS

Catalog Description Commercial HSK-PC Power Connection / End Termination
Part Number 387495