

IntelliTrace

ITC1 & ITC2

Digital Heat Trace Controller 1 & 2 Circuit

- 1 & 2 Circuit Models
- 40 Amps per Circuit
- SSR Control
- 100 – 277 VAC, 50/60 Hz
- Hazardous (Class I, Division 2) or Non Hazardous Areas
- Soft Start Feature
- Operating Temperature: -40°F to 104°F (-40°C to 40°C)
- Modbus RTU/RS485, RS422 & TCP/Ethernet
- 10" x 8" x 6" (26cm x 21cm x 15cm) NEMA 4X FG Wall Mount Enclosure
- High Resolution Color TFT Display
- LED Indication for Power, Load & Alarm per Circuit
- Front Panel Capacitive Touch Switches
- PID, On/Off or Manual Control Modes
- One or Two Sensor Inputs / Circuit – Min, Max & Averaging
- 2 Circuit Ambient Control from 1 RTD Sensor
- Full Monitoring & Alarms
 - High / Low Temperature & Current, GFEP & Sensor Failure
- Programmable Duty Cycle On Sensor Failure
- AC & DC Alarms
- Password Protected Security Levels
- CE, UL/cUL



Description

The Chromalox IntelliTRACE ITC series is designed for line or ambient sensing heat trace applications such as freeze protection and/or process temperature control. This controller may be used with constant wattage, mineral insulated or self regulating heating cables. The ITC is intended for use in industrial locations in either hazardous (Class I, Division 2) or non-hazardous environments.

The ITC Series is offered in either a single circuit or an independently controlled and monitored dual circuit platform. They provide a unique, industry-leading combination of heating capacity, application flexibility and technology.

The ITC is a microprocessor based system with SSR (Solid State Relay) power control which switches an impressive 40 Amps per circuit at 100-277 VAC.

There are three user-selectable control modes available on the ITC: Manual, Off or Auto. An output of 1% to 100% is available while in Manual Mode and you may choose either PID or ON/OFF control while in the Auto Control Mode.

You may employ one or two RTD sensors for either circuit. When using two RTD sensors, the ITC may be set to Low, High or Average. The ITC may also be configured as a 2-circuit ambient sensing controller that uses only one RTD to control both circuits. This provides the owner with much more flexibility and redundancy to help meet their ever-varying process demands.

The ITC employs a soft start feature that uses a proprietary software algorithm which eliminates the inherent self-regulating in-rush

current, resulting in less nuisance tripping at cold temperatures. The soft start feature is selectable which allows this controller to be employed in non-heat trace applications as well.

All process conditions may be monitored and managed both locally and remotely. All process variable, communication and alarm settings and security codes are user-adjustable via simple page menu navigation.

In terms of system supervision, the ITC controller monitors temperature, current load and ground fault equipment protection leakage current (GFEP). Additionally, the alarms on the ITC consist of high and low temperature, high and low current, high GFEP current and sensor failure. For GFEP see next page for specifics.

Should the ITC unit realize a failed sensor, the controller automatically switches into a user adjustable manual output duty cycle. To eliminate abrupt current spikes, the Chromalox ITC employs bumpless transfer power switching when switching over from either manual or auto mode.

The ITC unit is housed in a compact wall mountable, NEMA 4X FG or optional 316 SS enclosure and it features a high resolution TFT display, LED indication of Load, Power & Alarm status for each circuit and front panel capacitive touch user interface buttons which are mounted on a hinged door.

The ITC enclosure provides electrical connections for the heating cable, the AC Power and the RTD Sensors and it comes complete with stainless steel mounting brackets.

ITC1 & ITC2 Digital Heat Trace Controller 1 & 2 Circuit *(cont'd.)*

To comply with NEC code one of the following must apply:

1. Customer supplied 2 pole GFEP breaker in branch circuit breaker box upstream of the controller.
2. Requirement shall not apply in industrial establishments where there is alarm indication of ground faults and the following conditions apply:
 - a. Conditions of maintenance and supervision ensure that only qualified person(s) service the installed system
 - b. Continued circuit operation is necessary for safe operation of equipment or process

Specifications

Input

| | |
|-------------------------------|--|
| Sensor Type | 3-wire RTD, 100 Ω PT, 0.00385 Ω/Ω°C, 20 Ω balanced lead wire |
| Number of Sensor Inputs | 1 or 2 per Circuit |
| Sensing Configuration | Range: Single, Low, High, Average, Use RTD1 to control both circuits |

Output

| | |
|--------------------------|---------------------|
| Power Switching | SSR |
| Number of Circuits | 1 or 2 |
| Capacity | 40 Amps per Circuit |

Control Types

| | |
|-------------------------------------|----------------------------------|
| PID | Control mode must be set to Auto |
| Autotune | On or Off |
| Proportional Band, (°F) | Range: 1 – 100 |
| Integral (sec/repeat) | Range: 0 – 9,999 |
| Rate or Derivative, (seconds) | Range: 0 – 500 |
| On/Off | Control mode must be set to Auto |
| Dead band, (°F) | Range: 2 – 100 |
| Manual | Range: 0 – 100% |
| Soft Start, Current Clamping | Enable or Disable |

Settings

| | |
|--------------------------------|---|
| Temperature (PV) | Range: -80°F to +1100°F (-62°C to +593°C) |
| Low Temperature Alarm | Range: -80°F to +1050°F, Off (-62°C to +566°C, Off) |
| High Temperature Alarm | Range: -80°F to +1150°F, Off (-62°C to +621°C, Off) |
| Low Current Alarm | Range: 0.1 A – 50.0 A, Off |
| High Current Alarm | Range: 0.1 A – 50.0 A, Off |
| GFEP | Range: 30 mA – 150 mA |
| GFEP Alarm Condition | Alarm Only, Alarm & Trip, Alarm & Latch, Alarm & Trip & Latch |
| Output on Sensor Failure | Range: 0–100%, Bumpless Transfer to Manual Mode |
| Calendar | Year, Month, Day, Date, Hour & Minute |
| Audible button depress | Range: On, Off |
| Security | 3 Levels of password protected security |
| Alarm State | Normally Open, Normally Closed |

Display, HMI, Indication

| | |
|-----------------------|--|
| Display | 3.5" 320 x 240 RGB Full color graphic TFT module |
| Human Interface | 5 Capacitive Touch Input Buttons |
| LED Indication | Power (Green), Load (Amber), Alarm (Red) – Per Ckt |

Alarms

| Alarm Types | Low & High Temperature, Low & High Current, High GFEP, Sensor Failure | | | | | | | | | | | | |
|---------------------------|--|----------|---------|----------|------------------|--------|------|-----------------|------|--------|-----------|------|------|
| Alarm Relays | 1 x DC Alarm Output, 1.8 Amp, 0 - 50 VDC 1 x AC Alarm Output, 1.8 Amp, 12 - 240 VAC | | | | | | | | | | | | |
| Alarm Contact State | <table border="1"> <thead> <tr> <th>Mode</th> <th>Default</th> <th>Optional</th> </tr> </thead> <tbody> <tr> <td>Normal Operation</td> <td>Closed</td> <td>Open</td> </tr> <tr> <td>Alarm Condition</td> <td>Open</td> <td>Closed</td> </tr> <tr> <td>Power Off</td> <td>Open</td> <td>Open</td> </tr> </tbody> </table> | Mode | Default | Optional | Normal Operation | Closed | Open | Alarm Condition | Open | Closed | Power Off | Open | Open |
| Mode | Default | Optional | | | | | | | | | | | |
| Normal Operation | Closed | Open | | | | | | | | | | | |
| Alarm Condition | Open | Closed | | | | | | | | | | | |
| Power Off | Open | Open | | | | | | | | | | | |

Communications

| | |
|----------------------------|--------------------------|
| Modbus | RTU/RS-485 (2 or 4 wire) |
| Modbus | TCP/Ethernet (optional) |
| Websvrer/Ethernet IP | (Optional) |

Operating & Environmental

| | |
|------------------------|---|
| Temperature | -40°F to 104°F (-40°C to 40°C) |
| Power Supply | 100 to 277V 50/60Hz |
| Protection | IEC IP66 |
| Enclosure rating | NEMA 4X FG (Optional Stainless Steel) |
| Approvals | UL/cUL Ordinary and Class I, Division 2, Groups A,B,C,D Hazardous Locations. (UL File: E347725) CE |


ITC1 & ITC2

Digital Heat Trace Controller

1 & 2 Circuit (cont'd.)

Dimensions

| | | H | W | D | F | B | M |
|----------------------|------|------|------|------|-----|-----|-----|
| 316 SS Enclosure | Inch | 11.8 | 9.9 | 7.6 | 0.7 | 1.8 | 3.0 |
| | cm | 30.2 | 25.1 | 19.4 | 1.7 | 4.4 | 7.6 |
| Fiberglass Enclosure | Inch | 10.3 | 8.5 | 8.0 | 1.2 | 1.8 | 3.0 |
| | cm | 26.2 | 21.3 | 19.7 | 3.2 | 4.4 | 7.6 |

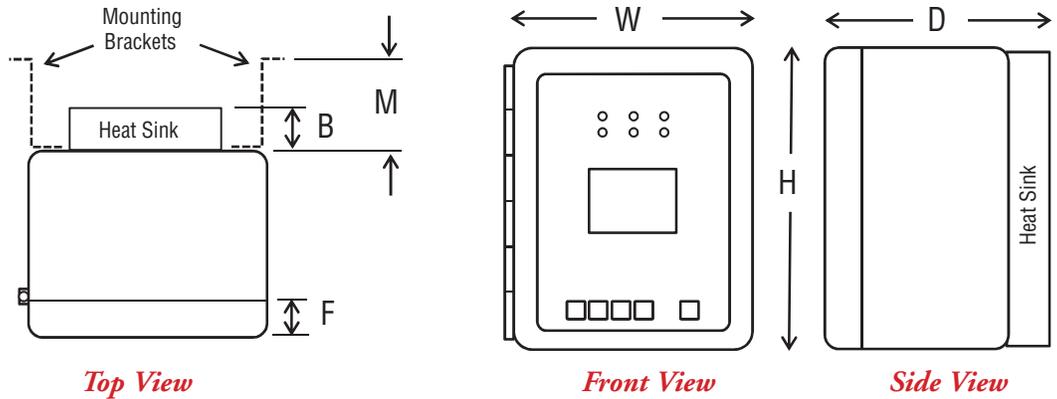

Ordering Information

To Order —
Complete the Model Number using the Matrix provided.

Model Product Description

ITC The Chromalox ITC series IntelliTRACE Controller will control 1 or 2 circuits and is designed for industrial Heat Trace Line and/or Ambient Sensing applications in Non-Hazardous or Hazardous (Class I, Division 2) areas. The ITC is a wall mounted device that operates at 100-277 VAC and rated at 40A per circuit in a -40°F to 104°F (-40°C to 40°C) Ambient. Standard features: NEMA 4X FG enclosure, 3.5" High Resolution TFT Display with integral display heater, front panel capacitive touch switches & LED Indication of Power, Load & Alarm. ON/OFF, PID or Manual SSR power control with a selectable Soft Start program. The ITC accepts up to 2 RTD sensors per circuit for Ambient and/or Line Sensing applications. With multiple sensors, output behavior is based on min, max, average temperature or as 2-circuit ambient sensing control from a single RTD. Other standard features include: 2 x common alarm outputs (1 x AC, 1 x DC), Alarms for Low/High Temperature & Current, GFEP (Ground Fault Equipment Protection) & Sensor Failure, ModBus RTU/RS485 (or /RS422) Communications and user selectable manual output on failed sensor. 16 gage Stainless Steel wall mounting brackets are included. UL/cUL & CE Optional features include: NEMA 4X 316 SS Enclosure, ModBus TCP/Ethernet, Webserver/Ethernet or BACnet IP communications. Standard 1 year warranty.

Code Number of Circuits

| | |
|---|------------|
| 1 | 1 Circuit |
| 2 | 2 Circuits |

Code Communications

| | |
|---|----------------------------|
| 0 | ModBus RTU/RS485 (& RS422) |
| 1 | ModBus TCP/Ethernet |
| 2 | Webserver/Ethernet |
| 3 | BACnet IP/Ethernet |
| 9 | Other Communications |

Code Enclosure Enclosure Size H x W x D, In (cm)

| | | |
|---|--------------------|----------------------------|
| 0 | NEMA 4X Fiberglass | 10 x 8 x 8 (25 x 21 x 20) |
| 1 | NEMA 4X 316 SS | 12 x 10 x 8 (30 x 25 x 19) |

Code Add to Complete Model Number

0

ITC 2- 0 0 0 Typical Model Number

Note: The ITC comes complete with one set of 16 gauge stainless steel wall mounting brackets.

| Model | Description | PCN | Model | Description | PCN |
|----------|------------------------------|--------|----------|------------------------------|--------|
| ITC1-000 | ITC 1 Loop, FG ENC, RS485 | 316101 | ITC1-010 | ITC 1 LOOP, SS ENC, RS485 | 316494 |
| ITC2-000 | ITC 2 Loop, FG ENC, RS485 | 316110 | ITC2-010 | ITC 2 LOOP, SS ENC, RS485 | 316507 |
| ITC1-100 | ITC 1 Loop, FG ENC, Ethernet | 316128 | ITC1-110 | ITC 1 LOOP, SS ENC, Ethernet | 316929 |
| ITC2-100 | ITC 2 LOOP, FG ENC, Ethernet | 316136 | ITC2-110 | ITC 2 LOOP, SS ENC, Ethernet | 316937 |