



MT-1 Clean Water Applications

- 1-1/4" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (53 - 86 W/in²)
- 0.6 - 2 kW
- Without Thermostat
- 120 and 240 Volt, Single Phase
- General Purpose, Moisture Resistant/Explosion Resistant Terminal Enclosure, or Moisture Resistant


E1 — Dimensions (Inches)

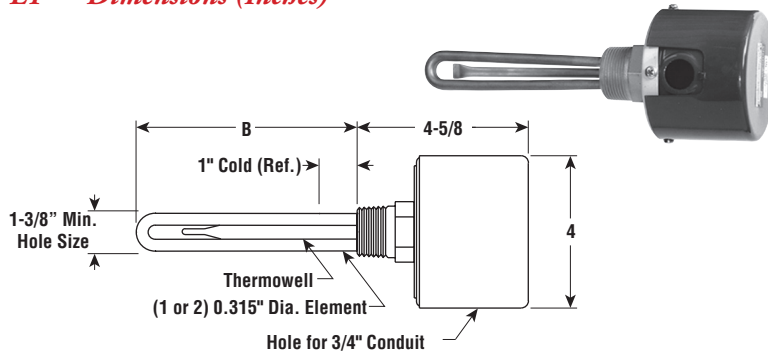

E2 — Dimensions (Inches)

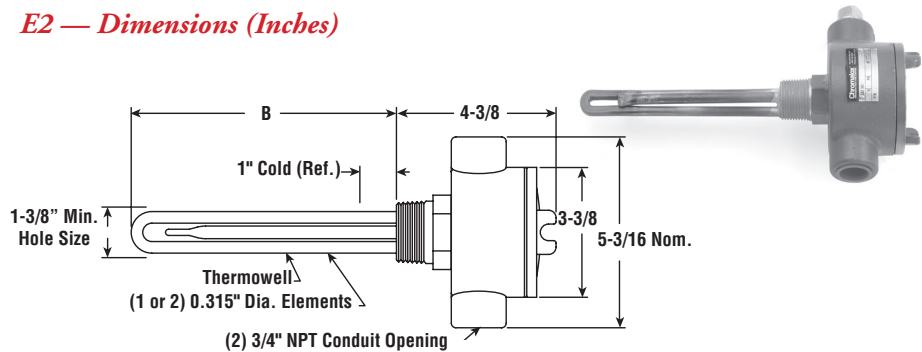

E4TP — Dimensions (Inches)

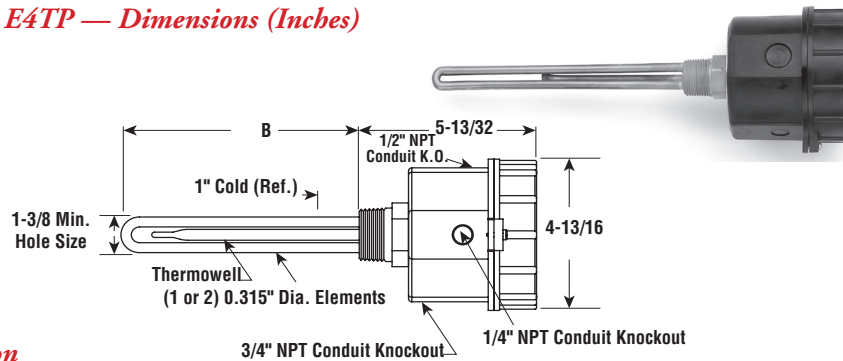

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/ Explosion Resistant ²				E4 Moisture Resistant			
kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
0.6	120	1	53	1	6	MT-160A	S	139310	1	MT-160E2	NS	288104	4	MT-160E4TP	NS	060476	1
0.6	240	1	53	1	6	MT-160A	NS	139328	1	MT-160E2	NS	288112	4	MT-160E4TP	NS	060484	1
0.75	120	1	65	1	6	MT-175A	S	139336	1	MT-175E2	NS	288120	4	MT-175E4TP	NS	060492	1
0.75	240	1	65	1	6	MT-175A	S	139344	1	MT-175E2	NS	288139	4	MT-175E4TP	NS	060505	1
1	120	1	86	1	6	MT-110A	S	139352	1	MT-110E2	S	288147	4	MT-110E4TP	NS	060396	1
1	240	1	86	1	6	MT-110A	S	139360	1	MT-110E2	NS	288155	4	MT-110E4TP	NS	060409	1
1	120	1	43	2	6	MT-110-3A	NS	139379	2	MT-110-3E2	NS	288163	5	MT-110-3E4TP	NS	060370	2
1	240	1	43	2	6	MT-110-3A	S	139387	2	MT-110-3E2	NS	288171	5	MT-110-3E4TP	NS	060388	2
1.2	120	1	53	2	6	MT-112A	NS	139395	2	MT-112E2	NS	288180	5	MT-112E4TP	NS	060417	2
1.2	240	1	53	2	6	MT-112A	NS	139408	2	MT-112E2	NS	288198	5	MT-112E4TP	NS	060425	2
1.5	120	1	65	2	6	MT-115A	S	139416	2	MT-115E2	NS	288200	5	MT-115E4TP	NS	060433	2
1.5	240	1	65	2	6	MT-115A	S	139424	2	MT-115E2	NS	288219	5	MT-115E4TP	NS	060441	2
2	120	1	86	2	6	MT-120A	S	139432	2	MT-120E2	NS	288227	5	MT-120E4TP	NS	060450	2
2	240	1	86	2	6	MT-120A	S	139440	2	MT-120E2	NS	288235	5	MT-120E4TP	NS	060468	2

Stock Status: S = stock NS = non-stock

To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are _cCSA_{US}® Certified.

Other Note — 4 - 6 kW and above available. Contact your Local Chromalox Sales office.

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."