

MVPC

Medium Voltage Power Converter System

- Rated up to 7,200 VAC
- Control loads up to 22MW
- Full SCR (Zero-Cross) or Hybrid (SCR/Contactor) Power Control
- Control loads from 0 – 100% with proprietary Chromalox control algorithm
- Patented Automatic Element Dry-Out Functionality
- Indoor, Outdoor, and Arc Containment Enclosures Available



CE

DESCRIPTION

The DirectConnect™ medium voltage power converter system (MVPC) provides a safe, efficient, and cost effective solution for controlling power to DirectConnect™ heating bundles.

Coupled with Chromalox's patented MV heating technology, the MVPC greatly reduces the number of circuits, installation and maintenance costs, as well as the footprint required to heat an application compared to a low voltage (< 1,000V) system.

The DirectConnect™ medium voltage power converter system controls all Chromalox DirectConnect™ MV heaters including bundles, circulation heaters, steam generators, and hot water generators.

BENEFITS

Automatic Element Dry-Out dries elements when excess moisture is detected via variable SCR firing modes and patented logic; drastically reducing process downtime and maintenance costs.

In-house Design and Build from the only third party certified manufacturer of medium voltage converter systems and metal-sheathed heaters. The MVPC has been independently tested and approved by the foremost medium voltage test lab in the world. All-In-One Control provides power and heating system control in one system. One system reduces installation cost and system complexity while ensuring power and heating control are in sync.

Reduced Footprint compared to a low voltage system, the MVPC controls the same heat load in a smaller package. Utilizing a reduced number of circuits and smaller cables results in instant installation cost savings.

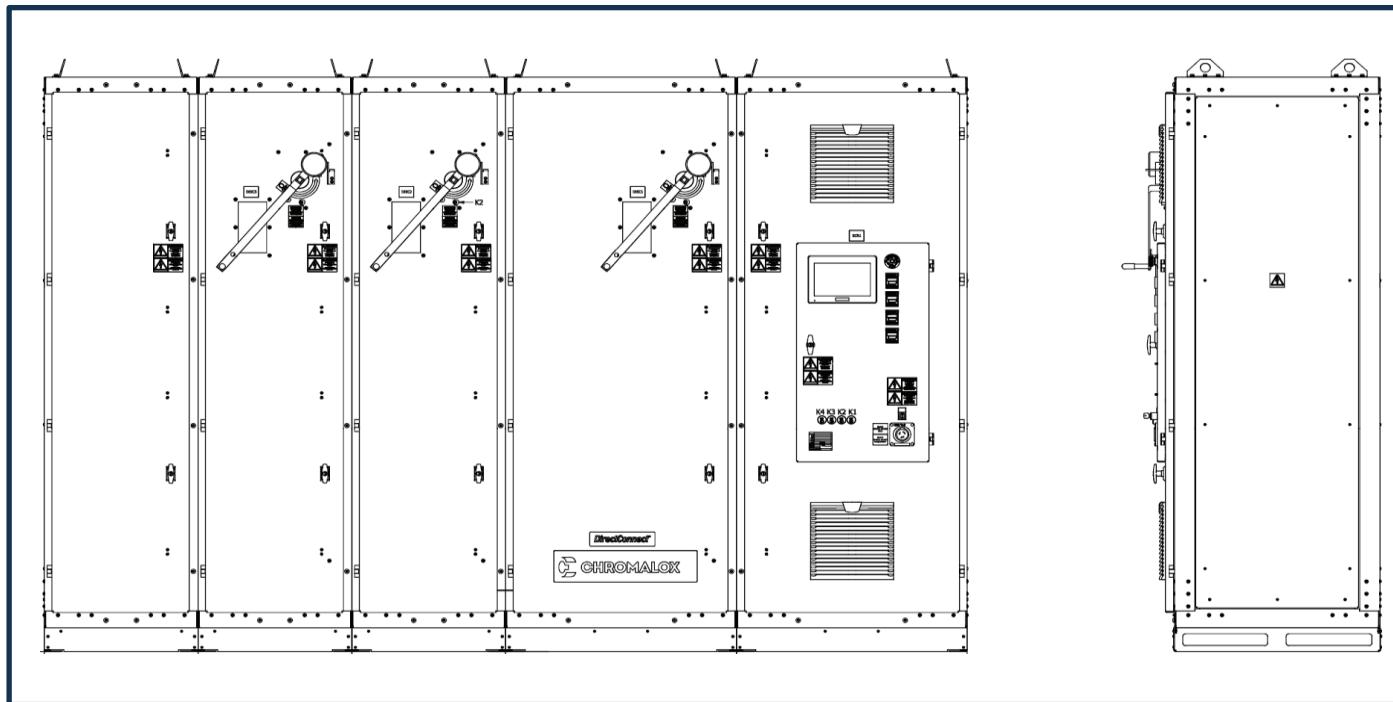
Proven Industry Leading Voltage Capabilities for resistance heating applications. The use of higher voltages results in an increase in system power efficiency through the reduction of I²R losses leading to operational cost savings.

Low Noise Power Transmission via overvoltage and overcurrent protection ensure reliable power transmission from a system with a Total Harmonic Distortion of less than 5%.

MVPC**Medium Voltage Power Converter System (Cont.)****SPECIFICATIONS**

| Electrical | Standard Feature | Optional |
|-------------------------------------|--|---|
| Nominal (Rated) Voltage, 50/60Hz | 4.16kV (4.76kV) 6.60kV (7.20kV) | 1.00 - 6.90kV ¹ (up to 7.20kV) |
| Nominal (Rated) Capacity | 960A (1,000A) | 1,920A (2,000A) |
| Short Circuit Current Rating (SCCR) | 50.0kA | |
| Basic Impulse Level (BIL) | 40.0kV | |
| Power Control Options | Hybrid (1 SCR + Contactor(s)) | Full SCR, Zoned, Multi-SCR Hybrid |
| Control Circuit Power | 120V (internally derived) | 120V, 230/240V (externally derived) |
| Main Bus | Tin plated copper with direct on line supply power termination | |
| Cable Entry/Exit Options | Bottom | Top (NEMA 2 / IP42, NEMA 1 / IP20D only) |
| Safety/Protection | Kirk Key Interlock per circuit, Disconnector per circuit, Surge Arrestors, Type E Short Circuit Fuses, Isolated Low Voltage Control compartment, Anti-Condensate Heaters | Arc Flash Optic Sensors Ultra Fast Earthing Switch Thermographic (IR) Viewing Windows |
| Ingress Rating | Non-arc resistant, indoor: NEMA 2 / IP42 Arc resistant, indoor: NEMA 1 / IP20D | Non-arc resistant, outdoor: NEMA 3R / IP54, NEMA 3RX / IP54 Non-arc resistant, in/outdoor: NEMA 12 / IP54 Z-Purge, suitable for Cl. 1, Div. 2 Gr. A – D / II 3G Ex ec ic [pzC] IIC T6 Gc (NEMA 3R / IP54, NEMA 3RX / IP54 only) |
| Enclosure Finish | Powder Coated Carbon Steel, RAL 7035 | 316SS, 2B finish (NEMA 3RX / IP54 only) |
| Central Control Unit | ProfaceTM HMI with Chromalox PCBs | Remote HMI |
| Discrete Input/Output | Emergency/Remote Shutdown Interlock Demand Signal Retransmit (4-20mA) PCB Common Alarms (Dry) | Integration Panel (IP) MVSGI only via IP: Pump ON/OFF, Blowdown Control Power (120V) |
| Process Input Options | Temperature (Sensor) Pressure (Transducer) (MVSGI1 only via IP) Heat Demand Signal (4 - 20mA, 0 – 100%) | MVSGI ² only via IP: Primary Low Water Cutoff, Auxiliary Low Water Cutoff |
| Monitoring | Ground Fault / Dry-out, Current, SCR Voltage/Temperature/Short/Imbalance, Over Temperature (up to 8 sensors), Supply Voltage ³ , Short Circuit ³ , Fan Failure, Blown Fuse | |
| Communications | Modbus RTU | ModBus TCP, BACnet |
| Ambient Temperature | 32°F (0 °C) min., 104 °F (40 °C) max. | -4 °F / -20 °C min, -40 °F / °C min. |
| Certifications | IEC/EN 62477-2, 2011/65/EU (RoHS 3), 2014/30/EU (EMC) | CSA-SPE-1000 |

¹Supply voltage tolerance cannot exceed 7.2kV ²Visit our website for more information on the MVSGI Medium Voltage Steam Generator, www.chromalox.com³Patent Pending

MVPC**Medium Voltage Power Converter System (Cont.)****NEMA 1 (IP20) / NEMA 2 (IP42) ENCLOSURE DIMENSIONS (3 CIRCUIT SYSTEM SHOWN)**

CONTROL SYSTEMS

STANDARD SIZE SPECIFICATIONS

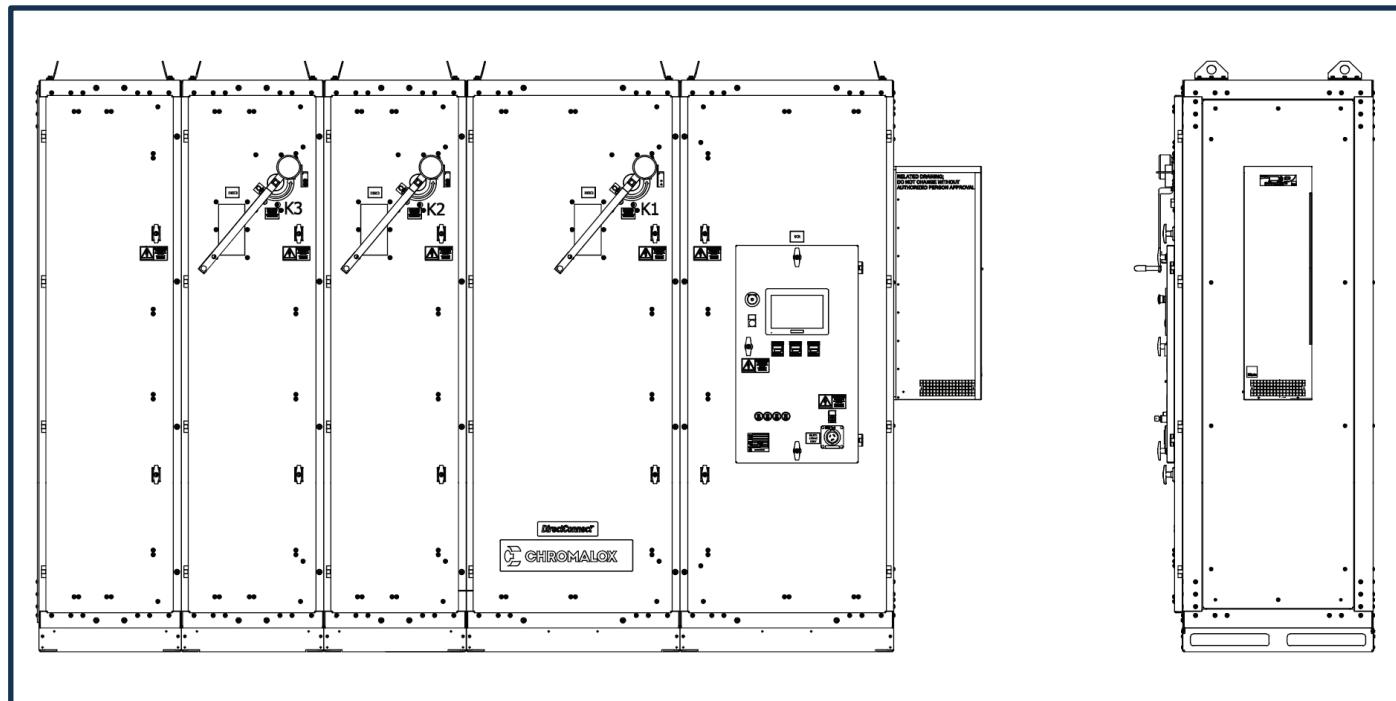
4,160V, 50/60Hz, Hybrid Power Control

| Circuits | Max. Power (kW) | Approx. Dimensions & Weights (in/mm, lbs/kg)* | | | |
|----------|-----------------|---|----------|--------|-------------|
| | | Height | Width | Depth | Weight |
| 1 | 2,300 | 94/2400 | 96/2400 | 33/829 | 4,265/1,935 |
| 2 | 4,600 | 94/2400 | 120/3000 | 33/829 | 5,290/2,400 |
| 3 | 6,900 | 94/2400 | 144/3600 | 33/829 | 6,315/2,865 |

6,600V, 50/60Hz, Hybrid Power Control

| Circuits | Max. Power (kW) | Approx. Dimensions & Weights (in/mm, lbs/kg)* | | | |
|----------|-----------------|---|----------|--------|-------------|
| | | Height | Width | Depth | Weight |
| 1 | 3,650 | 94/2400 | 96/2400 | 33/829 | 4,265/1,935 |
| 2 | 7,300 | 94/2400 | 120/3000 | 33/829 | 5,290/2,400 |
| 3 | 10,950 | 94/2400 | 144/3600 | 33/829 | 6,315/2,865 |

* 20" (508mm) arc shroud not shown or included in Dimensions & Weights, NEMA 1 (IP20) enclosure only

MVPC**Medium Voltage Power Converter System (Cont.)****NEMA 3R (IP54) / NEMA 3RX (IP54) ENCLOSURE DIMENSIONS (3 CIRCUIT SYSTEM SHOWN)****STANDARD SIZE SPECIFICATIONS**

4,160V, 50/60Hz, Hybrid Power Control

| Circuits | Max. Power (kW) | Approx. Dimensions & Weights (in/mm, lbs/kg) | | | |
|----------|-----------------|--|-----------|--------|-------------|
| | | Height | Width | Depth | Weight |
| 1 | 2,300 | 94/2400 | 111/2,270 | 33/829 | 3,630/1,704 |
| 2 | 4,600 | 94/2400 | 135/3,370 | 33/829 | 4,480/2,090 |
| 3 | 6,900 | 94/2400 | 159/3,970 | 33/829 | 5,330/2,476 |

6,600V, 50/60Hz, Hybrid Power Control

| Circuits | Max. Power (kW) | Approx. Dimensions & Weights (in/mm, lbs/kg) | | | |
|----------|-----------------|--|-----------|--------|-------------|
| | | Height | Width | Depth | Weight |
| 1 | 3,650 | 94/2400 | 111/2,770 | 33/829 | 3,630/1,704 |
| 2 | 7,300 | 94/2400 | 153/3,370 | 33/829 | 4,480/2,090 |
| 3 | 10,950 | 94/2400 | 159/3,970 | 33/829 | 5,330/2,476 |