


RCH-C Curved Face Ceramic Radiant Heater




- 6 - 44 W/In²
- 200 - 1,200 Watts
- 120, 240 and 480 Volt
- 4.8, 9.65 and 11.5" Lengths
- 2.36 and 3.65" Widths

**RCH-05, RCH-10 —
Dimensions (Inches)**

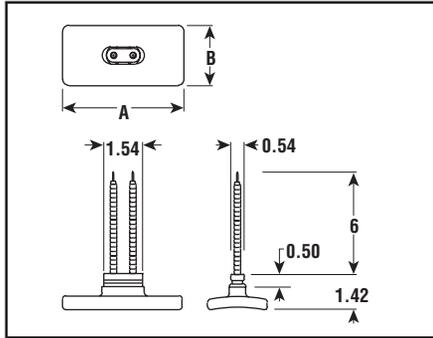

**RCH-12 —
Dimensions (Inches)**

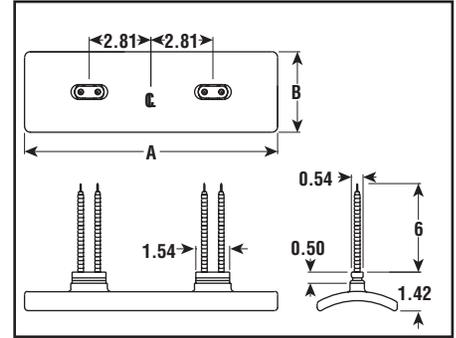

Applications

- Thermoforming
- Skin Sheeting for Packaging
- Gelling PVC Paste
- Adhesives Heating, Drying, Fixing
- Water Evaporation
- Powder Coat Curing
- Cooking and Warming Cabinets
- Preheat Embossing Rollers
- Enameling
- Preheat Molds
- Ink Drying

Features

Secure Electrical Connections are made by welding resistance wire to lead wire. Other designs simply twist the wires for a less reliable connection.

Higher Temperature Capability is possible with 6" long heavy duty, flexible lead wires.

Ceramic Sleeves in Element Mounting Tower offer further protection against lead wires shorting against the reflectors.

Quality Materials and Proprietary Production Processes ensure superior ceramic heater construction, integrity and operation.

Temperature Sensitive Labels visually indicate heater operation.

CERAMIC

Specifications and Ordering Information

Watts	W/In ²	DIM (In.)		Model	120V		240V		480V		Wt. (Lbs.)
		A	B		Stock	PCN	Stock	PCN	Stock	PCN	
200	18	4.8	2.36	RCH-05CR-200	—	—	NS	016150	—	—	0.5
250	22	4.8	2.36	RCH-05CR-250	NS	016176	NS	016192	NS	016213	0.5
325	29	4.8	2.36	RCH-05CR-325	—	—	S	016299	NS	016310	0.5
500	44	4.8	2.36	RCH-05CR-500	NS	016379	S	016395	NS	016416	0.5
200	9	9.65	2.36	RCH-10CR-200	NS	016467	—	—	—	—	0.75
300	13	9.65	2.36	RCH-10CR-300	NS	016555	—	—	—	—	0.75
400	18	9.65	2.36	RCH-10CR-400	—	—	NS	016678	—	—	0.75
500	22	9.65	2.36	RCH-10CR-500	NS	016707	NS	016723	S	016740	0.75
650	29	9.65	2.36	RCH-10CR-650	—	—	S	016820	NS	016846	0.75
750	33	9.65	2.36	RCH-10CR-750	S	016854	—	—	—	—	0.75
800	35	9.65	2.36	RCH-10CR-800	—	—	NS	016926	S	016942	0.75
1,000	44	9.65	2.36	RCH-10CR-1000	—	—	S	016977	S	016993	0.75
250	6	11.5	3.65	RCH-12CR-250	NS	017566	—	—	—	—	1
500	12	11.5	3.65	RCH-12CR-500	NS	017374	NS	017582	—	—	1
650	16	11.5	3.65	RCH-12CR-650	—	—	NS	017590	NS	017638	1
800	19	11.5	3.65	RCH-12CR-800	—	—	NS	017603	NS	017646	1
1,000	24	11.5	3.65	RCH-12CR-1000	—	—	NS	017611	NS	017654	1
1,200	29	11.5	3.65	RCH-12CR-1200	NS	017620	NS	017662	NS	—	1

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, PCN, watts, volts and quantity.