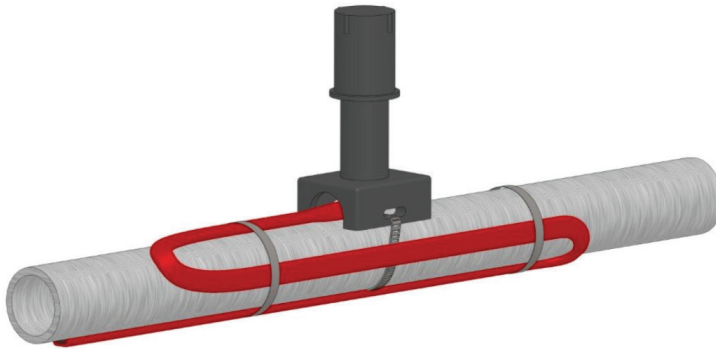


PRODUCT OVERVIEW


The Chromalox® UES End Seal kit is an above insulation NEMA 4X, IP66 rated end seal used to terminate SRL, SRP, SRM/E and CWM heating cables in freeze protection, piping process temperature maintenance, or fluid flow and viscosity maintenance applications. This kit provides water resistant cable termination for one cable. It has a corrosion resistant pipe stand-off that brings the cable end outside of the insulation for easy cable termination, and is approved for ordinary and hazardous area locations. A pipe strap (PS Series) is required to attach this model to a pipe. Small pipe adapter is available for pipe size less than 1-½" (38 mm).

DESCRIPTION

This kit provides above insulation end termination with end cap, pipe standoff, and grommets.

KIT CONTENTS

- 1 End Cap
- 1 Pipe Standoff
- 1 Self-Regulating Cable Grommet
- 3 Constant-Wattage Cable Grommets

MATERIALS

Pipe Standoff, End Cap	Electrostatic-charge-resistant, glass-filled engineered polymer, black
Self-Regulating Cable Grommet	Silicone rubber, black
Constant-Wattage Cable Grommet	Silicone rubber, orange

APPROVALS



- Ordinary Areas
- Class I, Division 2, Groups B, C, D
- Class II, Division 2, Groups E, F, G
- Class III
- Class I, Zone 1, AEx e II
- Ta -40°C to 40°C
- Type 4X, IP66
- T-Rating*



- Ordinary Areas
- Class I, Division 2, Groups B, C, D
- Class II, Division 2, Groups E, F, G
- Class III
- T-Rating*





- ETL24ATEX0405X
- II 2 G Ex eb IIC Gb T*
- Ta -60°C to 195°C**
- FM17ATEX0032X
- II 2 G Ex e IIC T* Gb
- Ta -40°C to 70°C**, IP 66



- ITS 07.0018X
- Ex eb II Gb T*
- Ta -60°C to 195°C**
- FMG 17.0015X
- Ex e IIC T* Gb
- Ta -40°C to 70°C**



- Ex e IIC T*, IP66




- Suitable for Hazardous Areas
- T-Rating*

*See cable schedule for T-rating

**See cable schedule for Ta

DIMENSIONS

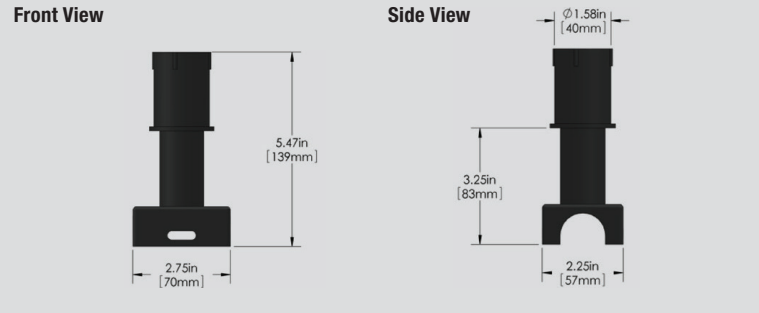

PRODUCT SPECIFICATIONS

Heating Cable Use.....	SRL, SRP, SRM/E, CWM
Ingress Protection.....	NEMA 4X, IP66
Minimal Install Temperature.....	-40°F (-40°C)
Maximum Exposure Temperature, Power Off.....	420°F (215°C)
Maximum Voltage.....	600 V
Maximum Circuit Breaker.....	50 A
Weight.....	4 lb (1.81 kg)

ORDER DETAILS

Catalog Description.....	UES End Seal
Part Number.....	393570



1347 Heil Quaker Blvd
LaVergne, TN 37086

TECHNICAL SUPPORT
412-967-3940

email: sales@chromalox.com
www.chromalox.com