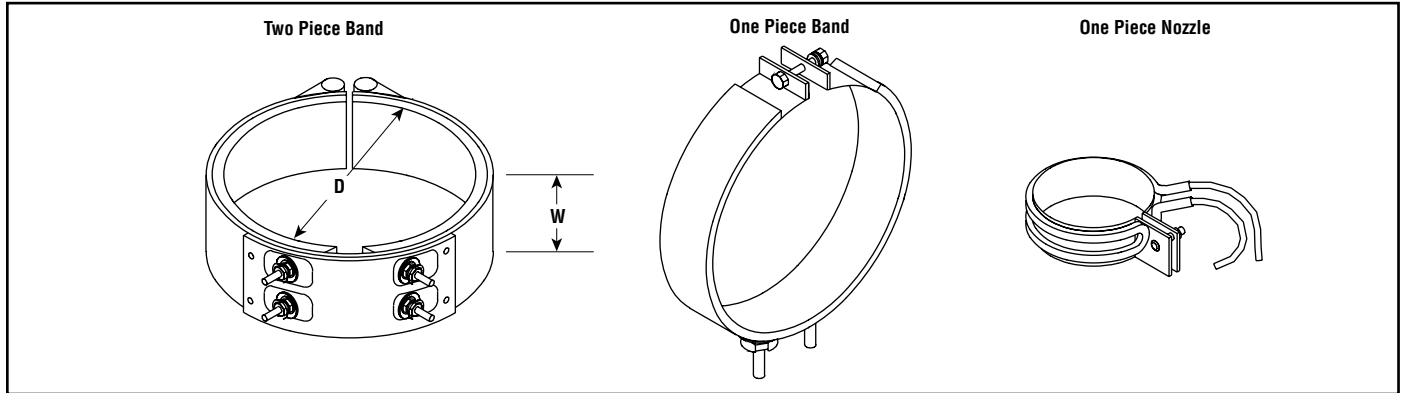


Chromalox®

Specification Data Sheet Band and Nozzle Heaters

Form PM300

Customer Name: _____ Reference No.: _____ Date: _____


Note — Drawing Is For Illustration Purposes Only

<i>Operating Conditions</i>		8. ELECTRICAL REQUIREMENTS:	
1. APPLICATION (Describe in Detail):		<input type="checkbox"/> Chromalox Standards <input type="checkbox"/> Insulation Resistance to be Min. Meg. <input type="checkbox"/> Leakage Current to be Max. mA. <input type="checkbox"/> Other (<i>Specify</i>)	
2. HEATED MEDIUM (Specify): <input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Solid		9. AGENCY APPROVALS:	
3. MAXIMUM WORK TEMPERATURE: °F		<input type="checkbox"/> None	
4. MAXIMUM SHEATH TEMPERATURE: °F		<input type="checkbox"/> UL Component Recognized	
5. INSTALLATION ENVIRONMENT: <input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor <input type="checkbox"/> Hazardous Class		<input type="checkbox"/> CSA Certified	
Div. Group		<input type="checkbox"/> Other (<i>Specify</i>)	
6. AMBIENT TEMPERATURE: °F		10. THIS HEATER IS A VARIATION OF STANDARD CATALOG HEATER:	
<i>Heater Specifications (Check All That Apply)</i>		<input type="checkbox"/> Yes Model No. = <input type="checkbox"/> No	
1. RATING: Volts Watts		11. OTHER SPECIAL FEATURES:	
2. BAND WIDTH: (W) Band Diameter: (D)		12. INCLUDE ADDITIONAL DETAILED INFORMATION, INCLUDING DETAILED SKETCH WHERE APPROPRIATE.	
3. <input type="checkbox"/> One Piece <input type="checkbox"/> Two Piece <input type="checkbox"/> Tubular HTR. <input type="checkbox"/> Strip HTR. <input type="checkbox"/> Mica Insulated			
4. SPECIAL TERMINATION: Lead Wire			
5. TERMINATION COVER:			
6. SHEATH MATERIAL (Other than Catalog Standard):			
7. SPECIAL HINGE CONSTRUCTION:			