


Chromalox®

Specification Data Sheet Mica Band and Nozzle Heaters

Form PM301

Customer Name: _____ Reference No.: _____ Date: _____

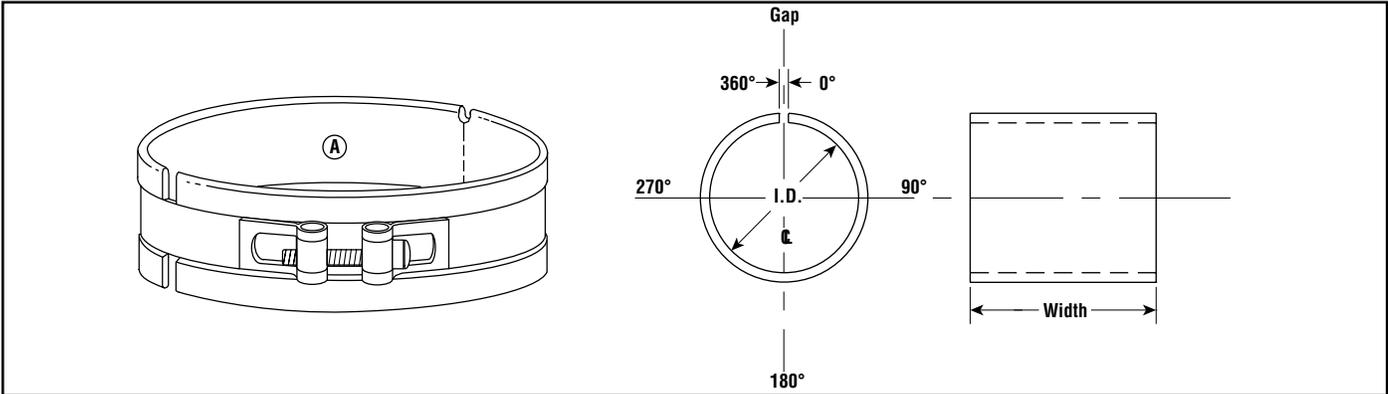

Note — Drawing Is For Illustration Purposes Only

Operating Conditions		6. LEAD TYPES:	
1. APPLICATION (Describe in Detail):		Gap:	<input type="checkbox"/> Fiberglas® (L) <input type="checkbox"/> Metal Braid (A)
		Opposing Gap:	<input type="checkbox"/> Fiberglas® (K)
		Single Center Exit:	<input type="checkbox"/> Fiberglas® (Y)
		<input type="checkbox"/> Metal Braid (C) <input type="checkbox"/> Conduit (M)	Galvanized S.Stl.
		<input type="checkbox"/> 3-PH w/Metal Braid	
		<input type="checkbox"/> 3-PH w/Conduit	Galvanized S.Stl.
		<input type="checkbox"/> Ground Wire Single Edge Exit:	<input type="checkbox"/> Metal Braid (B)
		Other:	<input type="checkbox"/> Europlug (EP) Horiz. Vert. 90°Box
		<input type="checkbox"/> Quick Disconnect (QD)	2-Prong 3-Prong
2. HEATED MEDIUM (Specify):		7. OPTIONS:	
<input type="checkbox"/> Gas	<input type="checkbox"/> Liquid	<input type="checkbox"/> Solid	
3. MAXIMUM WORK TEMPERATURE: _____ °F		<input type="checkbox"/> Stainless Steel Sheath	<input type="checkbox"/> End Fold
		<input type="checkbox"/> Special Gap Width _____ (in.)	
4. MAXIMUM WATT DENSITY ALLOWED:		<input type="checkbox"/> Terminal Box	2-Term. 3-Term.
		<input type="checkbox"/> Holes Location _____ ° from gap	dia. (in.)
Heater Specifications (Check All That Apply)		<input type="checkbox"/> Notches (attach drawing)	<input type="checkbox"/> Right Angle Elbow
		8. THERMOCOUPLE:	
1. HEATER DIMENSIONS:		<input type="checkbox"/> Internal Thermocouple	Type "J" Type "K"
I.D. (in.)	Width (in.)	<input type="checkbox"/> Thermocouple Bayonet Adapter	
I.D. (mm)	Width (mm)	9. ACCESSORIES:	
2. RATING:	Volts	Watts	<input type="checkbox"/> Ceramic Cover <input type="checkbox"/> Cust. Stamped P/N
3. CONSTRUCTION:			10. ELECTRICAL REQUIREMENTS:
<input type="checkbox"/> One Piece	<input type="checkbox"/> Two Piece	<input type="checkbox"/> Partial	<input type="checkbox"/> Chromalox Standards
<input type="checkbox"/> Expandable	<input type="checkbox"/> Hinged Half	<input type="checkbox"/> Reversible	<input type="checkbox"/> Insulation Resistance to be Min. _____ meg.
4. CLAMPING:			<input type="checkbox"/> Leakage Current to be Max. _____ mA.
<input type="checkbox"/> Separate Strap	<input type="checkbox"/> Low Profile Strap	<input type="checkbox"/> Built-in	<input type="checkbox"/> Other (Specify)
<input type="checkbox"/> Clamping Flanges	<input type="checkbox"/> Clamping Pads	<input type="checkbox"/> Wedgelok	11. AGENCY APPROVALS:
5. POST TERMINATIONS:			<input type="checkbox"/> None <input type="checkbox"/> UL Component Recognized
Type:	<input type="checkbox"/> Standard (T1)	<input type="checkbox"/> Tandem (T2)	<input type="checkbox"/> Parallel (T3)
	<input type="checkbox"/> DV or 3-Terminal		
Style:	<input type="checkbox"/> Standard	<input type="checkbox"/> Button	<input type="checkbox"/> CSA Certified <input type="checkbox"/> Other (Specify)
12. OTHER SPECIAL FEATURES: (attach detailed information)			