


## Built-Up Thermowells

- Isolates Sensor from Process
- For 1/4" Diameter Probes (4" to 26" Length)
- 1/2 NPT Outside 1/2 NPT Inside Thread
- 304 Stainless Steel



### Dimensions - BUTW (Built Up Thermowell)

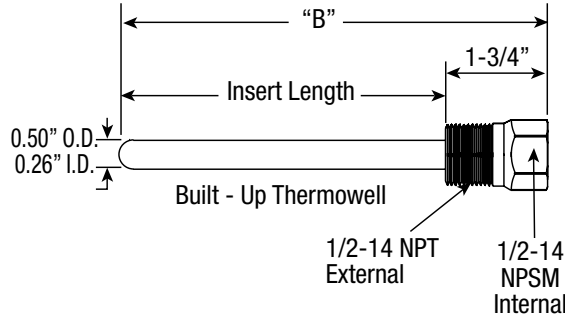

#### Note:

When fitting thermocouple to thermowell, probe length is the same as "B" dimension on thermowell.

### Description

Thermowells are among the simplest accessories used in industrial temperature measurement applications. They are used to provide isolation between a temperature sensor and the environment, either liquid, gas or slurry. A thermowell allows the temperature sensor to be removed and replaced without compromising either the ambient region or the process.

### Ordering Information

**BUTW** Built Up Thermowell with 0.50" O.D., 0.26" I.D.

CODE	Bushing Threads
<b>A</b>	1/2 NPT Outside, 1/2 NPT Inside
CODE	"B" Dimension
<b>XXX</b>	XXX = Length in Inches
CODE	Fraction of an inch
<b>A</b>	None
<b>B</b>	1/4"
<b>C</b>	1/2"
<b>E</b>	3/4"

<b>BUTW</b>	<b>A</b>	<b>012</b>	<b>A</b>	<b>Typical Model Number</b>
-------------	----------	------------	----------	-----------------------------