


## ARMTI-2 Solution Water Applications



- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (46 - 51 W/in<sup>2</sup>)
- 2 - 15 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Single Phase
- General Purpose Terminal Enclosure

### E1 — Dimensions (Inches)

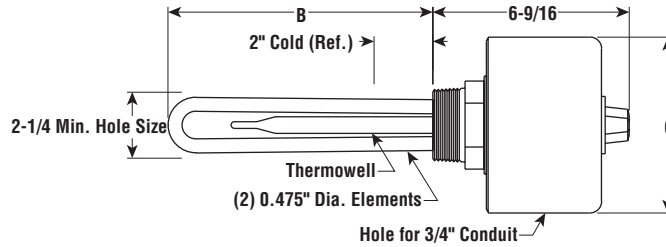

### Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/in <sup>2</sup>	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
<b>E1 General Purpose</b>												
2	240	1	51	2	8	6	ARMTI-2205-3T2	NS	187987	ARMTI-2205-3T1	NS	187995
2	480	1	51	2	8	6	ARMTI-2205-3T2	NS	188023	ARMTI-2205-3T1	NS	188031
2.5	240	1	51	2	9	7	ARMTI-2255T2	NS	188066	ARMTI-2255T1	NS	188074
2.5	480	1	51	2	9	7	ARMTI-2255T2	NS	188103	ARMTI-2255T1	NS	188111
3	240	1	48	2	12	7	ARMTI-2305T2	NS	188146	ARMTI-2305T1	NS	188154
3	480	1	48	2	12	7	ARMTI-2305T2	NS	188189	ARMTI-2305T1	NS	188197
4	240	1	47	2	17-1/2	7	ARMTI-2405T2	NS	188226	ARMTI-2405T1	NS	188234
4	480	1	47	2	17-1/2	7	ARMTI-2405T2	NS	188269	ARMTI-2405T1	NS	188277
5	240	1	46	2	19-5/8	8	ARMTI-2505T2	NS	188306	ARMTI-2505T1	NS	188314
5	480	1	46	2	19-5/8	8	ARMTI-2505T2	NS	188349	ARMTI-2505T1	NS	188347
6	240	1	46	2	25-1/16	8	ARMTI-2605T2	NS	188381	ARMTI-2605T1	NS	188390
6	480	1	46	2	25-1/16	8	ARMTI-2605T2	NS	188429	ARMTI-2605T1	NS	188437
7	240	1	49	2	28-1/8	9	ARMTI-2705T2	NS	188461	ARMTI-2705T1	NS	188470
7	480	1	49	2	28-1/8	9	ARMTI-2705T2	NS	188509	ARMTI-2705T1	NS	188517
10	240	1	46	2	40-5/8	10	ARMTI-21005T2	NS	188541	ARMTI-21005T1	NS	188550
10	480	1	46	2	40-5/8	10	ARMTI-21005T2	NS	188584	ARMTI-21005T1	NS	188592
12	240	1	46	2	47-5/8	11	ARMTI-21205T2 <sup>1</sup>	NS	188621	ARMTI-21205T1 <sup>1</sup>	NS	188630
12	480	1	46	2	47-5/8	11	ARMTI-21205T2	NS	188664	ARMTI-21205T1	NS	188672
15	240	1	50	2	54	12	ARMTI-21505T2 <sup>1</sup>	NS	188701	ARMTI-21505T1 <sup>1</sup>	NS	188710
15	480	1	50	2	54	12	ARMTI-21505T2	NS	188744	ARMTI-21505T1	NS	188752

**Stock Status:** S = stock NS = non-stock  
**To Order**—Specify model, volts, phase, kW, PCN and quantity.

1. Not UL Listed or CSA Certified (Exceeds 48 Amps).

**FASTShip**

Same-day shipping on stock item  
 orders received before 4 pm CST.  
 3-day shipping on assembly-stock items.

## ARMTI-2


### Solution Water Applications *(cont'd.)*



SCREW PLUG

- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (46 - 51 W/in<sup>2</sup>)
- 2 - 15 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Single Phase
- Moisture Resistant/Explosion Resistant Terminal Enclosure

*E2 — Dimensions (Inches)*

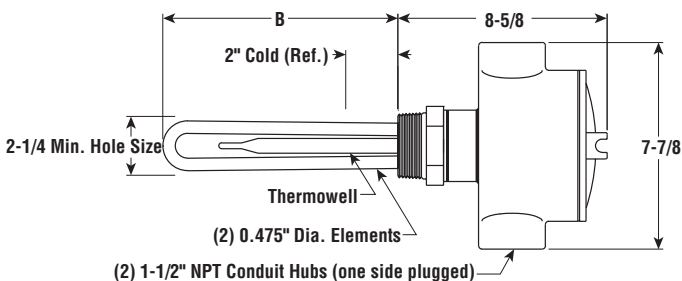

### Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/in <sup>2</sup>	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
<b>E2 Moisture Resistant /Explosion Resistant</b>												
2	240	1	51	2	8	12	ARMTI-2205-3E2T2	NS	188007	ARMTI-2205-3E2T1	NS	188015
2	480	1	51	2	8	12	ARMTI-2205-3E2T2	NS	188040	ARMTI-2205-3E2T1	NS	188058
2.5	240	1	51	2	9	13	ARMTI-2255E2T2	NS	188082	ARMTI-2255E2T1	NS	188090
2.5	480	1	51	2	9	13	ARMTI-2255E2T2	NS	188120	ARMTI-2255E2T1	NS	188138
3	240	1	48	2	12	13	ARMTI-2305E2T2	NS	188162	ARMTI-2305E2T1	NS	188170
3	480	1	48	2	12	13	ARMTI-2305E2T2	NS	188200	ARMTI-2305E2T1	NS	188218
4	240	1	47	2	17-1/2	13	ARMTI-2405E2T2	NS	188242	ARMTI-2405E2T1	NS	188250
4	480	1	47	2	17-1/2	13	ARMTI-2405E2T2	NS	188285	ARMTI-2405E2T1	NS	188293
5	240	1	46	2	19-5/8	14	ARMTI-2505E2T2	NS	188322	ARMTI-2505E2T1	NS	188330
5	480	1	46	2	19-5/8	14	ARMTI-2505E2T2	NS	188365	ARMTI-2505E2T1	NS	188373
6	240	1	46	2	25-1/16	14	ARMTI-2605E2T2	NS	188402	ARMTI-2605E2T1	NS	188410
6	480	1	46	2	25-1/16	14	ARMTI-2605E2T2	NS	188445	ARMTI-2605E2T1	NS	188453
7	240	1	49	2	28-1/8	15	ARMTI-2705E2T2	NS	188488	ARMTI-2705E2T1	NS	188496
7	480	1	49	2	28-1/8	15	ARMTI-2705E2T2	NS	188525	ARMTI-2705E2T1	NS	188533
10	240	1	46	2	40-5/8	16	ARMTI-21005E2T2	NS	188568	ARMTI-21005E2T1	NS	188576
10	480	1	46	2	40-5/8	16	ARMTI-21005E2T2	NS	188605	ARMTI-21005E2T1	NS	188613
12	240	1	46	2	47-5/8	17	ARMTI-21205E2T2 <sup>1</sup>	NS	188648	ARMTI-21205E2T1 <sup>1</sup>	NS	188656
12	480	1	46	2	47-5/8	17	ARMTI-21205E2T2	NS	188680	ARMTI-21205E2T1	NS	188699
15	240	1	50	2	54	18	ARMTI-21505E2T2 <sup>1</sup>	NS	188728	ARMTI-21505E2T1 <sup>1</sup>	NS	188736
15	480	1	50	2	54	18	ARMTI-21505E2T2	NS	188760	ARMTI-21505E2T1	NS	188779

**Stock Status:** S = stock NS = non-stock  
**To Order**—Specify model, volts, phase, kW, PCN and quantity.

1. Not cCSA<sub>US</sub>® Certified (Exceeds 48 Amps).

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.