


AREMTI-3

Mildly Corrosive Solution Applications




- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- Medium Watt Density (23 W/In²)
- 3 - 9 kW
- Integral Thermostat (DPST)
- 120, 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

E1 — Dimensions (Inches)

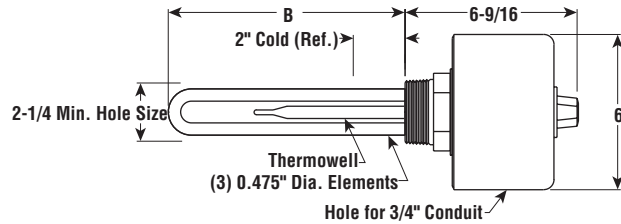

E2 — Dimensions (Inches)

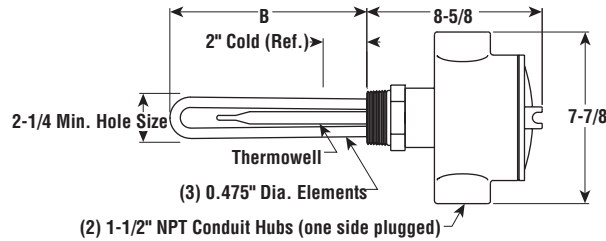

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
3	240	3	23	3	17-3/4	8	AREMTI-30305T2	NS	091985	AREMTI-30305T1	NS	032694
3	480	3	23	3	17-3/4	8	AREMTI-30305T2	NS	091993	AREMTI-30305T1	NS	032707
4.5	240	3	23	3	24-7/8	9	AREMTI-30455T2	NS	092005	AREMTI-30455T1	NS	032715
4.5	480	3	23	3	24-7/8	9	AREMTI-30455T2	NS	097560	AREMTI-30455T1	NS	032723
6	240	3	23	3	32-7/16	10	AREMTI-30605T2	NS	097578	AREMTI-30605T1	NS	032731
6	480	3	23	3	32-7/16	10	AREMTI-30605T2	NS	097586	AREMTI-30605T1	NS	032740
7.5	240	3	23	3	40-3/8	11	AREMTI-30755T2	NS	097594	AREMTI-30755T1	NS	032758
7.5	480	3	23	3	40-3/8	11	AREMTI-30755T2	NS	097607	AREMTI-30755T1	NS	032766
9	240	3	23	3	47-7/8	12	AREMTI-30905T2	NS	097615	AREMTI-30905T1	NS	032774
9	480	3	23	3	47-7/8	12	AREMTI-30905T2	NS	097623	AREMTI-30905T1	NS	032782
E2 Moisture Resistant/Explosion Resistant²												
3	240	3	23	3	17-3/4	13	AREMTI-30305E2T2	NS	032790	AREMTI-30305E2T1	NS	032897
3	480	3	23	3	17-3/4	13	AREMTI-30305E2T2	NS	032803	AREMTI-30305E2T1	NS	032900
4.5	240	3	23	3	24-7/8	14	AREMTI-30455E2T2	NS	032811	AREMTI-30455E2T1	NS	032918
4.5	480	3	23	3	24-7/8	14	AREMTI-30455E2T2	NS	032820	AREMTI-30455E2T1	NS	032926
6	240	3	23	3	32-7/16	15	AREMTI-30605E2T2	NS	032838	AREMTI-30605E2T1	NS	032934
6	480	3	23	3	32-7/16	15	AREMTI-30605E2T2	NS	032846	AREMTI-30605E2T1	NS	032942
7.5	240	3	23	3	40-3/8	16	AREMTI-30755E2T2	NS	032854	AREMTI-30755E2T1	NS	032950
7.5	480	3	23	3	40-3/8	16	AREMTI-30755E2T2	NS	032862	AREMTI-30755E2T1	NS	032969
9	240	3	23	3	47-7/8	17	AREMTI-30905E2T2	NS	032870	AREMTI-30905E2T1	NS	032977
9	480	3	23	3	47-7/8	17	AREMTI-30905E2T2	NS	032889	AREMTI-30905E2T1	NS	032985

Stock Status: S = stock NS = non-stock
To Order — Specify model, volts, phase, kW, PCN and quantity.



Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA_{US} Certified.