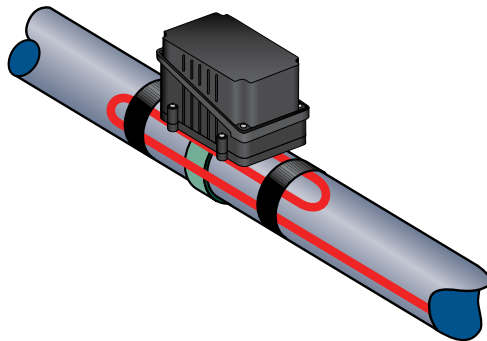


PRODUCT OVERVIEW


Chromalox® RTST splice and tee box is a NEMA 4X rated junction box designed to make straight or tee splices for CPR, CPM, HWM and CZH, and are approved for ordinary and hazardous location areas. These models provide water resistant cable entry for two cables for a splice or three cables for a tee, enclosure support, terminal block, and a water and corrosion resistant wiring enclosure. The enclosure is molded of durable, high performance polyphenylene sulfide (PPS) thermoplastic that is corrosion resistant, non-flammable, impact resistant, resistant to acids and alkalis, resistant to sunlight and abrasion, exhibits high strength, and provides high temperature stability. Hardware is stainless steel to ensure the integrity of the system. A pipe strap (PS Series) is required for a complete installation of this product. A small pipe adapter is available for pipe sizes less than 1½ inch (38 mm).

DESCRIPTION

This kit provides a splice and tee junction box, terminal block and three conduit entries.

KIT CONTENTS

- 1 Molded Junction Box Consisting of:
 - 1 Base
 - 1 Box with Conduit Opening
 - 1 Lid
- 1 Three-Position Terminal Block
- 1 Black Cable Grommet
- 1 Orange Cable Grommet
- 1 Cover Gasket
- 4 Cover Screws
- 4 Box Screws
- 1 Mounting Screw for Terminal Block

MATERIALS

Junction Box	Electrostatic-charge-resistant, glass-filled engineered polymer, black
Self-Regulating Cable Grommet	Silicone rubber, black
Constant-Wattage Cable Grommet	Silicone rubber, orange
Cover Gasket, O-Ring	Silicone rubber, black
Cover Screws (4)	Stainless steel

COMMERCIAL RTST SPLICE & TEE BOX

APPROVALS



• Ordinary Areas




• Ordinary Areas




DIMENSIONS

Front View



Side View



PRODUCT SPECIFICATIONS

Heating Cable Use	CPR, CPM, HWM, CZH
Ingress Protection	NEMA 4X
Conduit Hub Size	3/4 in. (19 mm)
Minimal Install Temperature	-40°F (-40°C)
Maximum Exposure Temperature, Power Off	420°F (215°C)
Terminals	2 for line, 1 for ground
Maximum Voltage	600 V
Maximum Circuit Breaker	50 A
Conductor Size Range	8 - 16 AWG
Weight	4 lb (1.81 kg)

ORDER DETAILS

Catalog Description	Commercial RTST Splice and Tee Box
Part Number	513148



1347 Heil Quaker Blvd
LaVergne, TN 37086

TECHNICAL SUPPORT
412-967-3940

email: sales@chromalox.com
www.chromalox.com

*press 1 to be directed to heat trace support