



TMW-2 Small Tank Applications



- 1-1/4" NPT Brass Screw Plug
- Copper Sheath Element
- 64 - 86 W/in²
- 750 - 5,000 Watts
- 120 and 240 Volt, Single Phase
- Without Terminal Cover
- Without Thermowell

Application



- Clean Water Heating



Dimensions (Inches)

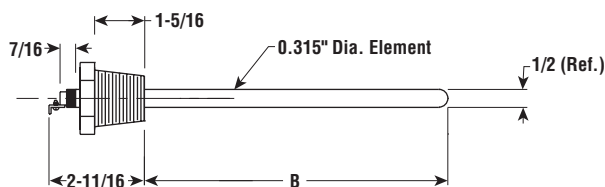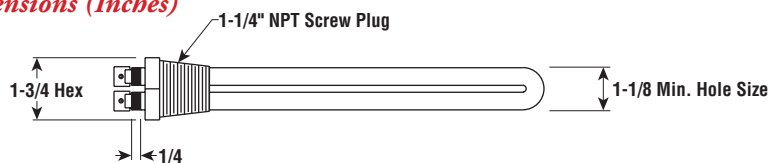

Dimensions (Inches)

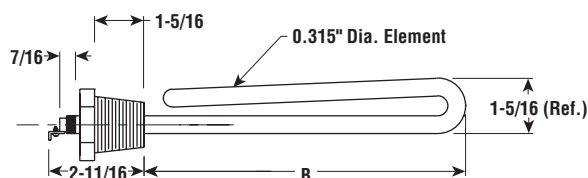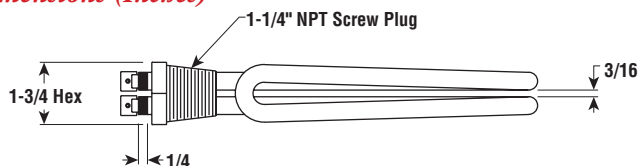

Specifications and Ordering Information

Watts	Volts	Phase	W/in ²	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)
Straight Element								
750	120	1	64	6-1/8	TMW-207A	NS	139150	0.5
750	240	1	64	6-1/8	TMW-207A	NS	139168	0.5
1,000	120	1	85	6-1/8	TMW-210A	NS	139176	0.5
1,000	240	1	85	6-1/8	TMW-210A	NS	139184	0.5
1,250	120	1	82	7-7/8	TMW-212A	NS	139192	1
1,250	240	1	82	7-7/8	TMW-212A	NS	139205	1
1,500	120	1	86	9-1/16	TMW-215A	S	139213	1.25
1,500	240	1	86	9-1/16	TMW-215A	NS	139221	1.25
Foldback Element								
2,000	120	1	85	6-5/8	TMW-220A	S	139230	1.5
2,000	240	1	85	6-5/8	TMW-220A	S	139248	1.5
2,500	240	1	80	8-1/2	TMW-225A	S	139264	2
3,000	240	1	78	10-3/16	TMW-230A	S	139280	2.25
4,000	240	1	77	13-9/16	TMW-240A	NS	139299	2.5
5,000	240	1	76	16-15/16	TMW-250A	S	139301	3
Stock Status: S = stock NS = non-stock To Order —Specify model, volts, phase, watts, PCN and quantity.								

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."